

## Dual Channel USB3.0 Redriver/Equalizer

Check for Samples: [SN65LVPE502](#)

### FEATURES

- Single Lane USB 3.0 Equalizer/Redriver
- Selectable Equalization, De-emphasis and Output Swing Control
- Integrated Termination
- Hot-Plug Capable
- Receiver Detect
- Low Power:
  - 315mW(TYP),  $V_{CC} = 3.3V$
- Auto Low Power Modes:
  - 5mW (TYP) When no Connection Detected
  - 70mW (TYP) When in U2/U3 Mode
- Excellent Jitter and Loss Compensation Capability: to 24"
  - 24" of 6 mil Stripline on FR4
  - 12" on Input and 4m, 26AWG USB 3.0 Cable on Output
- Small foot print – 24 Pin (4mm × 4mm) QFN Package
- High Protection Against ESD Transient
  - HBM: 5,000 V
  - CDM: 1,500 V
  - MM: 200 V

### APPLICATIONS

- Notebooks, Desktops, Docking Stations, Backplane and Cabled Application

### DESCRIPTION

The SN65LVPE502 is a dual channel, single lane USB 3.0 redriver and signal conditioner supporting data rates of 5.0Gbps. The device complies with USB 3.0 spec revision 1.0, supporting electrical idle condition and low frequency periodic signals (LFPS) for USB 3.0 power management modes.

#### Programmable EQ, De-Emphasis and Amplitude Swing

The SN65LVPE502 is designed to minimize signal degradation effects such as crosstalk and inter-symbol interference (ISI) that limits the interconnect distance between two devices. The input stage of each channel offers selectable equalization settings that can be programmed to match loss in the channel. The differential outputs provide selectable de-emphasis to compensate for the anticipated distortion USB 3.0 signal will experience. Level of de-emphasis will depend on the length of interconnect and its characteristics. The SN65LVPE502 provides a unique way to tailor output de-emphasis on a per channel basis with use of DE and OS pins. All Rx and Tx equalization settings supported by the device are programmed by six 3-state pins as shown in [Table 2](#).

#### Low Power Modes

The device supports three low power modes as described below.

##### 1. Sleep Mode

Initiated anytime EN\_RXD undergoes a high to low transition or when device powers up with EN\_RXD set low. In sleep mode both input and output terminations are held at HiZ and device ceases operation to conserve power. Sleep mode max power consumption is 1mW, entry time is 2 $\mu$ s, device exits sleep mode to Rx.Detect mode after EN\_RXD is driven to  $V_{CC}$ , exit time is 100 $\mu$ s max.

##### 2. RX Detect Mode – When no remote device is connected

Anytime SN65LVPE502 detects a break in link (i.e., when upstream device is disconnected) or after powerup fails to find a remote device, SN65LVPE502 goes to Rx Detect mode and conserves power by shutting down majority of the internal circuitry. In this mode, input termination for both channels are driven to Hi-Z. In Rx Detect mode device power is <10mW(TYP) or less than 5% of its normal operating power This feature is useful in saving system power in mobile applications like notebook PC where battery life is critical.

Anytime an upstream device gets reconnected the redriver automatically senses the connection and goes to normal operating mode. This operation requires no setting to the device.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

### 3. U2/U3 Mode

With the help of internal timers the device tracks when link enters USB 3.0 low power modes U2 and U3, in these modes link is in electrical idle state. SN65LVPE502 will selectively turn-off internal circuitry to save on power. Typical power saving is about 75% lower than normal operating mode. The device will automatically revert to active mode when signaling activity (LFPS) is detected.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## DESCRIPTION CONTINUED

### Receiver Detection

RX.Detect cycle is performed by first setting Rx termination for each channel to Hi-Z, device then starts sensing for receiver termination that may be attached at the other end of each TX.

If receiver is detected on both channel:

- The TX and RX terminations are switched to  $Z_{DIFF-TX}$ ,  $Z_{DIFF-RX}$ , respectively

If no receiver is detected on one or both channels:

- The transmitter is pulled to Hi-Z
- The channel is put in low power mode
- Device attempts to detect Rx termination in 12 ms (TYP) interval until termination is found or the device is put in sleep mode.

### USB Compliance Mode

The device enters USB compliance mode when both EN\_RXD and CM pins are set H. This mode is used to test the transmitter for compliance to voltage and timing specifications per USB 3.0 compliance specs. In this mode each channel will maintain its low-impedance termination  $R_{DC-RX}$ , while auto Rx detect operation in the device is disabled.

### Electrical Idle Support

The electrical idle support is needed for low frequency periodic signaling (LFPS) used in USB 3.0 side band communication. A link is in an electrical idle state when the  $TX_{\pm}$  voltage is held at a steady constant value like the common mode voltage. SN65LVPE502 detects an electrical idle state when  $RX_{\pm}$  voltage at the device pin falls below  $V_{RX\_IDLE\_DIFFpp}$  min. After detection of an idle state in a given channel the device asserts electrical idle state in its corresponding TX. When  $RX_{\pm}$  voltage exceeds  $V_{RX\_IDLE\_DIFFpp}$  max normal operation is restored and output start passing input signal. The electrical idle exit and entry time is specified at  $\leq 6$  ns.

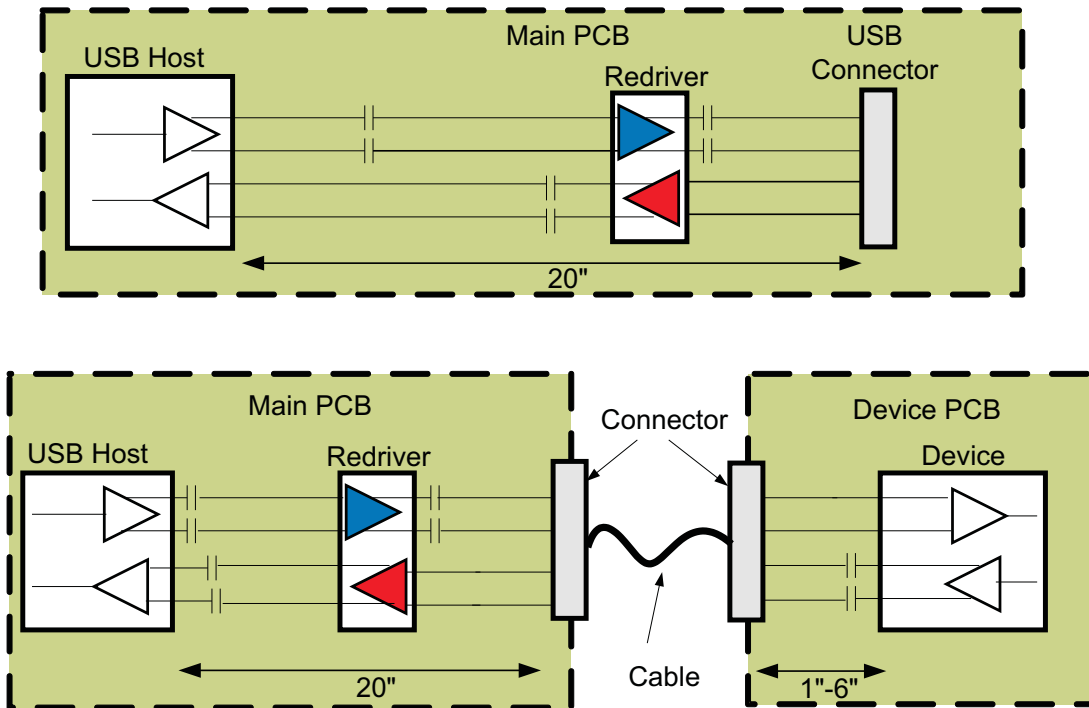


Figure 1. Typical Application

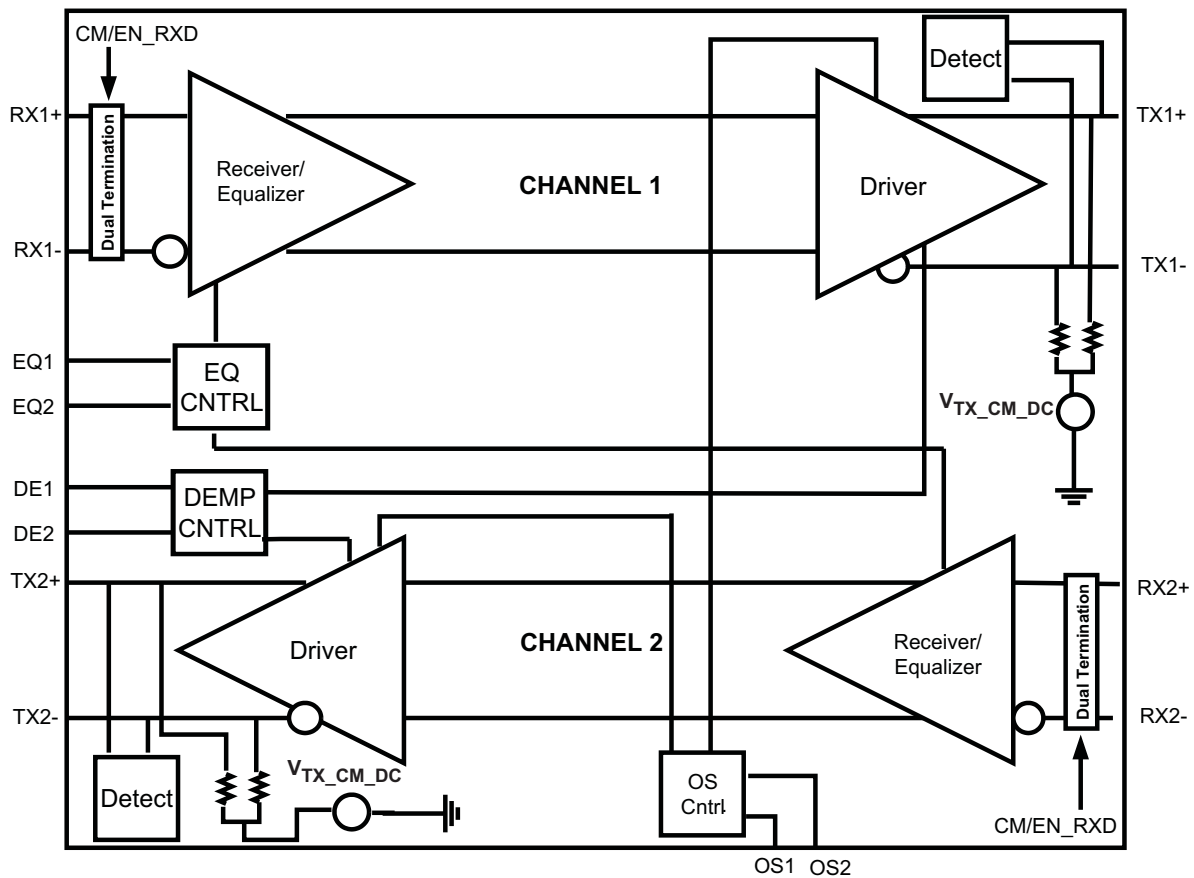


Figure 2. Data Flow Block Diagram

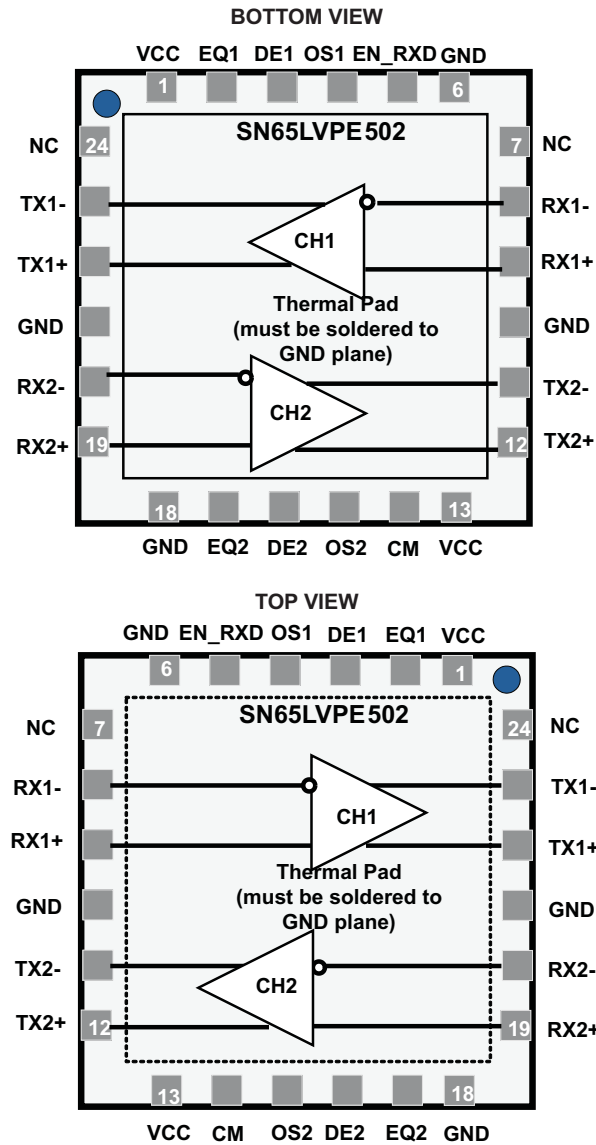


Figure 3. Flow-Through Pin-Out

Table 1. Pin Description

PIN			DESCRIPTION
NUMBER	NAME	I/O TYPE	
<b>HIGH SPEED DIFFERENTIAL I/O PINS</b>			
8	RX1-	I, CML	Non-inverting and inverting CML differential input for CH 1 and CH 2. These pins are tied to an internal voltage bias by dual termination resistor circuit
9	RX1+	I, CML	
20	RX2-	I, CML	
19	RX2+	I, CML	
23	TX1-	O, VML	Non-inverting and inverting VML differential output for CH 1 and CH 2. These pins are internally tied to voltage bias by termination resistors
22	TX1+	O, VML	
11	TX2-	O, VML	
12	TX2+	O, VML	

**Table 1. Pin Description (continued)**


PIN			
<b>DEVICE CONTROL PIN</b>			
5	EN_RXD	I, LVCMOS	Sets device operation modes per Table 2. Internally pulled to VCC
14	CM	I, LVCMOS	Sets device in compliance mode when pulled to VCC, internally pulled to GND
7,24	NC		Pads not internally connected
<b>EQ CONTROL PINS<sup>(1)</sup></b>			
3,16	DE1, DE2	I, LVCMOS	Selects de-emphasis settings for CH 1 and CH 2 per Table 2. Internally tied to $V_{CC}/2$
2,17	EQ1, EQ2	I, LVCMOS	Selects equalization settings for CH 1 and CH 2 per Table 2. Internally tied to $V_{CC}/2$
4, 15	OS1, OS2	I, LVCMOS	Selects output amplitude for CH 1 and CH 2 per Table 2. Internally tied to $V_{CC}/2$
<b>POWER PINS</b>			
1,13	VCC	Power	Positive supply should be $3.3V \pm 10\%$
6,10,18,21	GND	Power	Supply ground

(1) Internally biased to  $V_{CC}/2$  with  $>200k\Omega$  pull-up/pull-down. When pins are left as NC board leakage at this pin pad must be  $< 1 \mu A$  otherwise drive to  $V_{CC}/2$  to assert mid-level state.

**Table 2. Signal Control Pin Setting**

OS <sub>x</sub> <sup>(1)</sup>		TRANSITION BIT AMPLITUDE (TYP mVpp)	
NC (default)		1000	
0		870	
1		1085	
EQ <sub>x</sub> <sup>(1)</sup>		EQUALIZATION dB	
NC (default)		0	
0		7	
1		15	
DE <sub>x</sub> <sup>(1)</sup>	OS <sub>x</sub> <sup>(1)</sup> = NC	OS <sub>x</sub> <sup>(1)</sup> = 0	OS <sub>x</sub> <sup>(1)</sup> = 1
NC	-3.5 dB	-2.2 dB	-4.4 dB
0	-6.0 dB	-5.2 dB	-6.0 dB
1	-8.5 dB	-8.9 dB	-7.6 dB
EN_RXD		DEVICE FUNCTION	
1 (default)		Normal operating mode	
0		Sleep mode	
CM		DEVICE FUNCTION	
0 (default)		Normal Mode	
1		Compliance mode	

(1) Applies to Channel 1 and Channel 2 at 2.5 GHz.

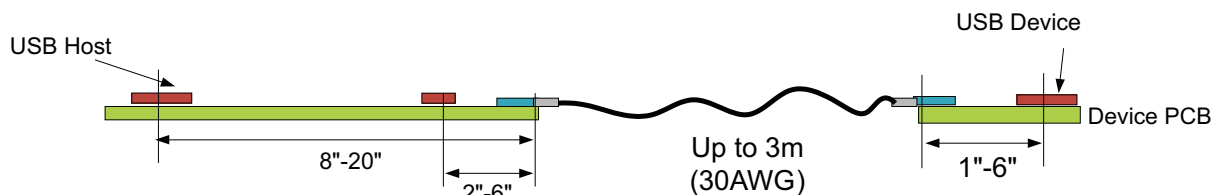

**Figure 4. Redriver Placement Example**

**ORDERING INFORMATION<sup>(1)</sup>**

PART NUMBER	PART MARKING	PCAKAGE
SN65LVPE502RGER	LVPE502	24-pin RGE Reel (large)
SN65LVPE502RGET	LVPE502	24-pin RGE Reel (small)

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

**ABSOLUTE MAXIMUM RATINGS**

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		UNITS / VALUES
Supply Voltage Range <sup>(2)</sup>	V <sub>CC</sub>	–0.5 V to 4 V
Voltage Range	Differential I/O	–0.5 V to 4 V
	Control I/O	–0.5 V to V <sub>CC</sub> + 0.5V
Electrostatic discharge	Human Body Model <sup>(3)</sup>	±5000V
	Charged Device Model <sup>(4)</sup>	±1500V
	Machine Model <sup>(5)</sup>	±200V
Continuous power dissipation		See Dissipation Rating Table

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values, except differential voltages, are with respect to network ground terminal.

(3) Tested in accordance with JEDEC Standard 22, Test Method A114-B.

(4) Tested in accordance with JEDEC Standard 22, Test Method C101-A.

(5) Tested in accordance with JEDEC Standard 22, Test Method A115-A.

**PACKAGE CHARACTERIZATION**

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
P <sub>D</sub>	Device power dissipation	CM, EN_RXD, EQ cntrl pins = NC, K28.5 pattern at 5 Gbps, V <sub>ID</sub> = 1000 mVpp		330	450	mW
P <sub>SD</sub>	Device power dissipation under low power mode	EN_RXD= GND		0.3	1	mW

**THERMAL INFORMATION**

THERMAL METRIC <sup>(1)</sup>		SN65LVPE502	UNITS
		RGE	
		24 PINS	
θ <sub>JA</sub>	Junction-to-ambient thermal resistance	46	°C/W
θ <sub>JC(TOP)</sub>	Junction-to-case(top) thermal resistance	42	
θ <sub>JB</sub>	Junction-to-board thermal resistance	13	
ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.5	
ψ <sub>JB</sub>	Junction-to-board characterization parameter	9	
θ <sub>JC(BOTTOM)</sub>	Junction-to-case(bottom) thermal resistance	4	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](http://SPRA953).

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V <sub>CC</sub>	Supply Voltage	3	3.3	3.6	V
C <sub>COUPLING</sub>	AC Coupling Capacitor	75		200	nF
	Operating free-air temperature	0		85	°C

## DEVICE POWER

The SN65LVPE502 is designed to operate from a single 3.3 V supply.

## ELECTRICAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>DEVICE PARAMETERS</b>						
I <sub>CC</sub>	Supply Current	EN_RXD, CM, EQ cntrl = NC, K28.5 pattern at 5 Gbps, V <sub>ID</sub> = 1000 mV <sub>pp</sub>		100	120	mA
I <sub>CC</sub> <sub>Rx.Detect</sub>		In Rx.Detect mode		2	5	
I <sub>CC</sub> <sub>sleep</sub>		EN_RXD = GND			0.1	
I <sub>CC</sub> <sub>U2-U3</sub>		Link in USB low power state		21		
	Maximum Data Rate				5	Gbps
t <sub>ENB</sub>	Device Enable Time	Sleep mode exit time EN_RXD L→H With Rx termination present			100	μs
t <sub>DIS</sub>	Device Disable Time	Sleep mode entry time EN_RXD H→L			2	μs
T <sub>RX.DETECT</sub>	Rx.Detect Start Event	Power-up time			100	μs
<b>CONTROL LOGIC (under recommended operating conditions)</b>						
V <sub>IH</sub>	High level Input Voltage		1.4		V <sub>CC</sub>	V
V <sub>IL</sub>	Low Level Input Voltage		-0.3		0.5	V
V <sub>HYS</sub>	Input Hysteresis			150		mV
I <sub>IH</sub>	High Level Input Current	OSx, EQx, DEx = V <sub>CC</sub>			30	μA
		EN_RXD = V <sub>CC</sub>			1	
		CM = V <sub>CC</sub>			30	
I <sub>IL</sub>	Low Level Input Current	OSx, EQx, DEx = GND	-30			μA
		EN_RXD = GND	-30			
		CM = GND	-1			
<b>RECEIVER AC/DC</b>						
V <sub>in</sub> <sub>diff_pp</sub>	RX1, RX2 Input Voltage Swing	AC coupled differential RX peak to peak signal	100		1200	mVpp
V <sub>CM_RX</sub>	RX1, RX2 Common Mode Voltage			3.3		V
V <sub>in</sub> <sub>COM_P</sub>	RX1, RX2 AC Peak common mode voltage	Measured at Rx pins with termination enabled			150	mVP
Z <sub>DC_RX</sub>	DC common mode impedance		18	26	30	Ω
Z <sub>diff_RX</sub>	DC differential input impedance		72	80	120	Ω
Z <sub>RX_High_IMP+</sub>	DC Input High Impedance	Device in sleep mode Rx termination not powered. Measured with respect to GND over 500mV max	50	85		kΩ
V <sub>RX-LFPS-DETpp</sub>	Low Voltage Periodic Signaling (LFPS) Detect Threshold	Measured at receiver pin, below minimum output is squelched, above max input signal is passed to output	100		300	mVpp
RL <sub>RX-DIFF</sub>	Differential Return Loss	50 MHz – 1.25 GHz	10	11		dB
		1.25 GHz – 2.5 GHz	6	7		
RL <sub>RX-CM</sub>	Common Mode Return Loss	50 MHz – 2.5 GHz	11	13		dB

## ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>TRANSMITTER AC/DC</b>						
V <sub>TXDIFF_TB_PP</sub>	Differential peak-to-peak Output Voltage (VID = 800, 1200 mVpp, 5Gbps)	R <sub>L</sub> = 100Ω +1%, DEX, OS <sub>x</sub> = NC, <b>Transition Bit</b>	800	1000	1200	mV
		R <sub>L</sub> = 100Ω +1%, DEX, OS <sub>x</sub> = GND <b>Transition Bit</b>	870			
		R <sub>L</sub> = 100Ω +1%, DEX, OS <sub>x</sub> = VCC <b>Transition Bit</b>	1085			
V <sub>TXDIFF_NTBP_PP</sub>		R <sub>L</sub> = 100Ω +1%, DEX=NC, OS <sub>x</sub> = 0,1,NC <b>Non-Transition Bit</b>	665			
		R <sub>L</sub> = 100Ω +1%, DEX=0, OS <sub>x</sub> = 0,1,NC <b>Non-Transition Bit</b>	510			
		R <sub>L</sub> = 100Ω +1%, DEX=1 OS <sub>x</sub> = 0,1,NC <b>Non-Transition Bit</b>	375			
De-Emphasis Level		OS <sub>1,2</sub> = NC (for OS <sub>1,2</sub> = 1 and 0 see Table 2)	-3.0	-3.5	-4.0	dB
			-6.0			
			-8.5			
T <sub>DE</sub>	De-Emphasis Width		0.85			UI
Z <sub>diff_TX</sub>	DC Differential Impedance		72	90	120	Ω
Z <sub>CM_TX</sub>	DC Common Mode Impedance	Measured w.r.t to AC ground over 0-500mV	18	23	30	Ω
R <sub>Ldiff_TX</sub>	Differential Return Loss	f = 50 MHz – 1.25 GHz	9	10		dB
		f = 1.25 GHz – 2.5 GHz	6	7		
R <sub>LCM_TX</sub>	Common Mode Return Loss	f = 50 MHz – 2.5 GHz	11	12		dB
I <sub>TX_SC</sub>	TX short circuit current	TX± shorted to GND			60	mA
V <sub>TX_CM_DC</sub>	Transmitter DC common-mode voltage		2.0	2.6	3.0	V
V <sub>TX_CM_AC_Active</sub>	TX AC common mode voltage active			30	100	mVpp
V <sub>TX_idle_diff-AC-pp</sub>	Electrical idle differential peak to peak output voltage	HPF to remove DC	0		10	mV
V <sub>TX_CM_DeltaU1-U0</sub>	Absolute delta of DC CM voltage during active and idle states			35	200	mV
V <sub>TX_idle_diff-DC</sub>	DC Electrical idle differential output voltage	Voltage must be low pass filtered to remove any AC component	0		10	mV
V <sub>detect</sub>	Voltage change to allow receiver detect	Positive voltage to sense receiver termination			600	mV
t <sub>R</sub> , t <sub>F</sub>	Output Rise/Fall time	20%-80% of differential voltage measure 1" from the output pin	30	50		ps
t <sub>RF_MM</sub>	Output Rise/Fall time mismatch				20	ps
T <sub>diff_LH</sub> , T <sub>diff_HL</sub>	Differential Propagation Delay	De-Emphasis = -3.5dB (CH 0 and CH 1). Propagation delay between 50% level at input and output See Figure 5		290	350	ps
t <sub>idleEntry</sub> t <sub>idleExit</sub>	Idle entry and exit times	See Figure 6		4	6	ns
C <sub>TX</sub>	Tx input capacitance to GND	At 2.5 GHz		1.25		pF
<b>EQUALIZATION</b>						
T <sub>TX-EYE</sub> <sup>(1)(2)</sup>	<b>Total Jitter (Tj) at point A</b>	Device setting: OS1 = L, DE1 = H, EQ1 = L		0.14	0.5	Ulpp <sup>(3)</sup>
DJ <sub>TX</sub> <sup>(2)</sup>	Deterministic Jitter (Dj)			0.06	0.3	
RJ <sub>TX</sub> <sup>(2)(4)</sup>	Random Jitter (Rj)			0.08	0.2	
T <sub>TX-EYE</sub> <sup>(1)(2)</sup>	<b>Total Jitter (Tj) at point B</b>	Device setting: OS2 = H, DE2 = H, EQ2 = L		0.14	0.5	Ulpp <sup>(3)</sup>
DJ <sub>TX</sub> <sup>(2)</sup>	Deterministic Jitter (Dj)			0.06	0.3	
RJ <sub>TX</sub> <sup>(2)(4)</sup>	Random Jitter (Rj)			0.08	0.2	

(1) Includes Rj at 10<sup>-12</sup>

(2) Measured at the end of reference channel in Figure 8 with K28.5 pattern, V<sub>ID</sub>=1000mVpp, 5Gbps, -3.5dB DE from source.

(3) UI = 200ps

(4) Rj calculated as 14.069 times the RMS random jitter for 10<sup>-12</sup> BER



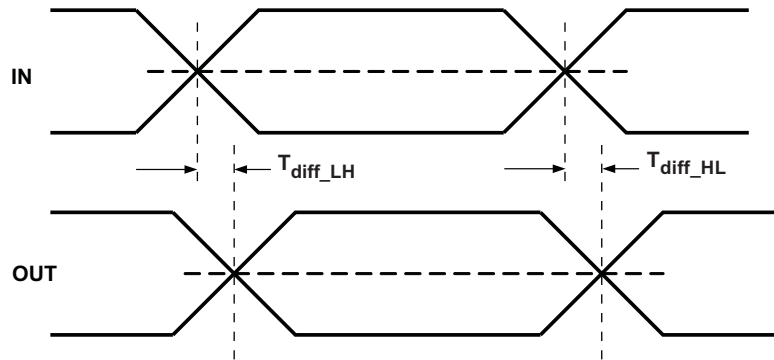


Figure 5. Propagation Delay

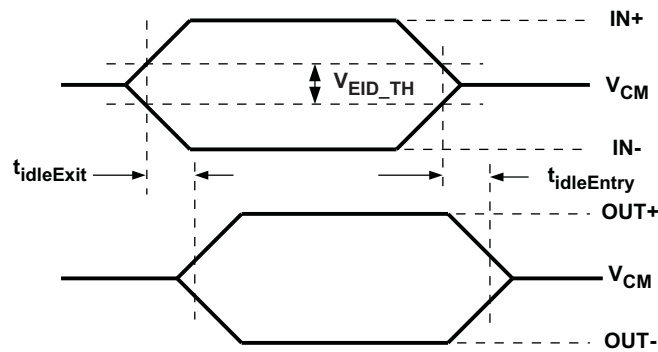


Figure 6. Electrical Idle Mode Exit and Entry Delay

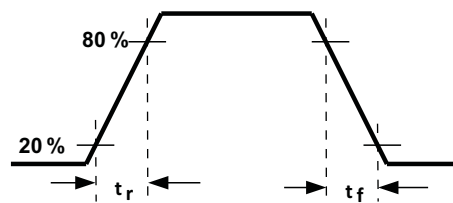


Figure 7. Output Rise and Fall Times

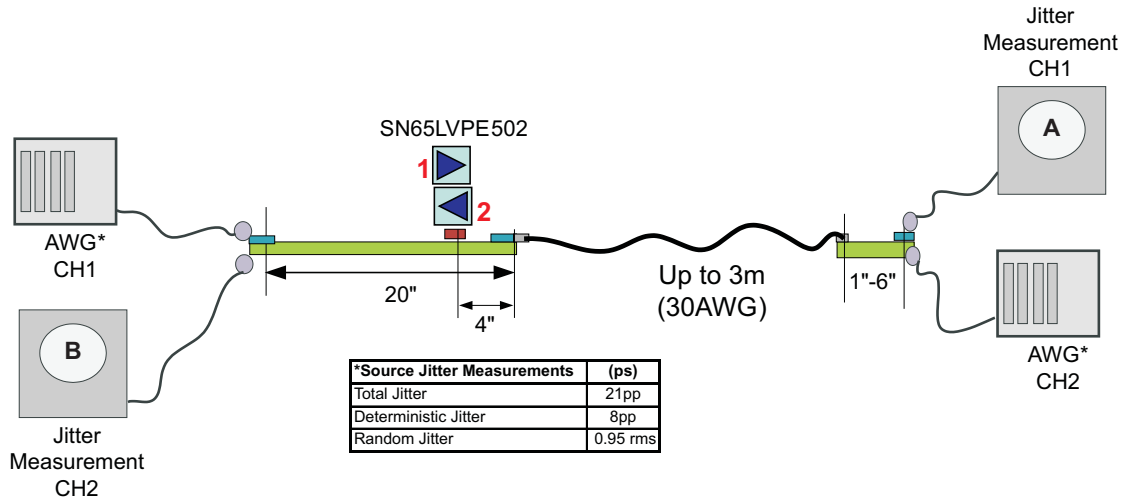


Figure 8. Jitter Measurement Setup

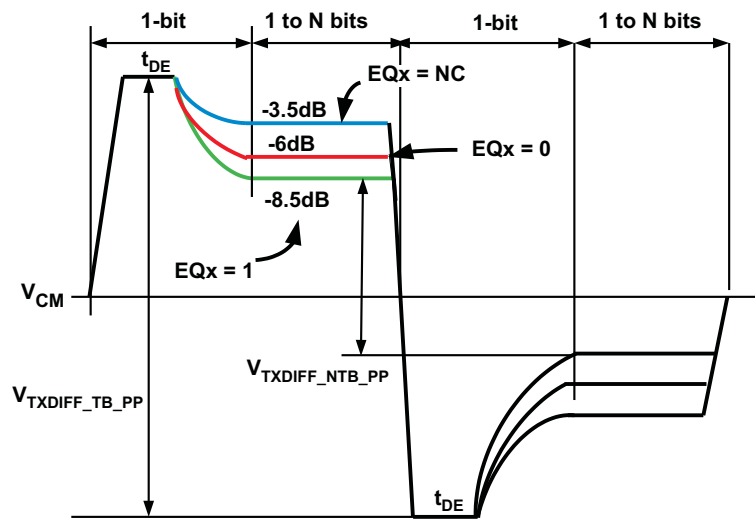


Figure 9. Output De-Emphasis Levels OSx = NC

### Typical Eye Diagram and Performance Curves

Input Signal Characteristics: Data Rate = 5 Gbps,  $V_{ID} = 1000$  mVpp, DE = -3.5 dB, Pattern = K28.5 Device  
 Operating Conditions: VCC = 3.3 V, Temp = 25°C

### Input Trace Length Held Constant and Output Cable Length Varied

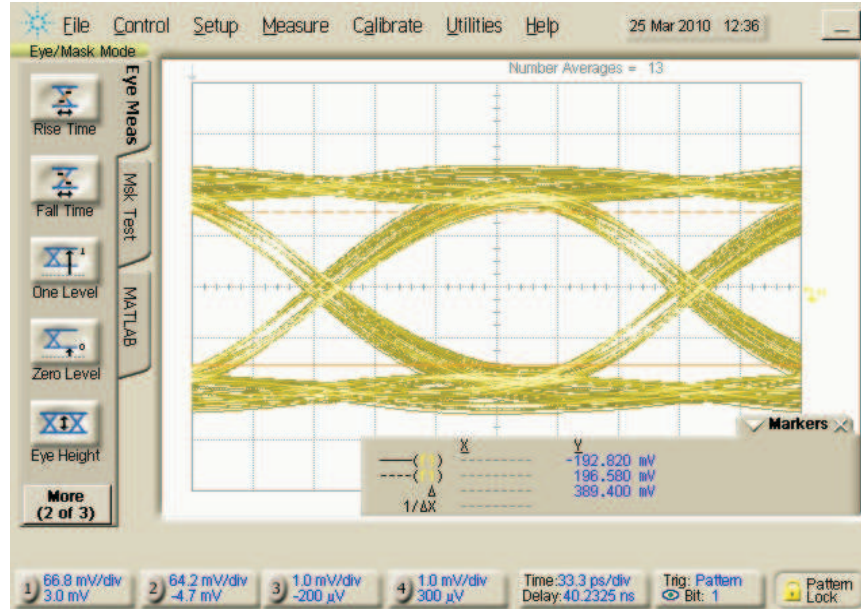


Figure 10. Input Trace = 12 Inches, 6 mil and Output USB 3 Cable Length = 1 M

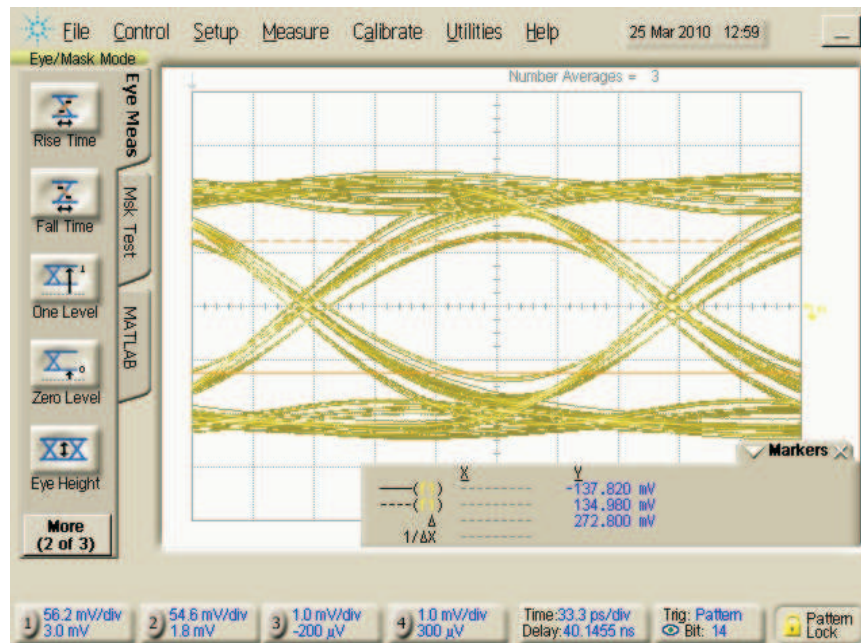


Figure 11. Input Trace = 12 Inches, 6 mil and Output USB 3 Cable Length = 2 M

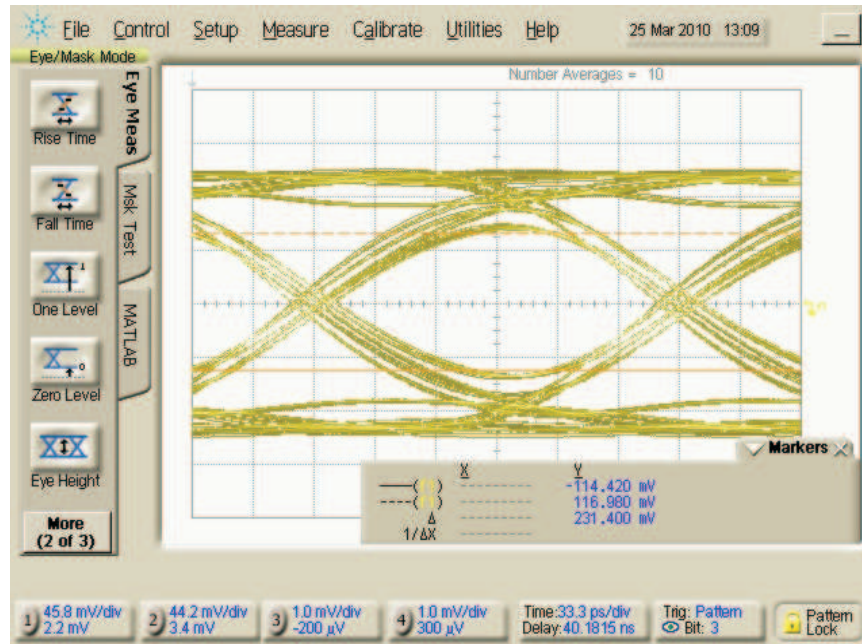


Figure 12. Input Trace = 12 Inches, 6 mil and Output USB 3 Cable Length = 3 M

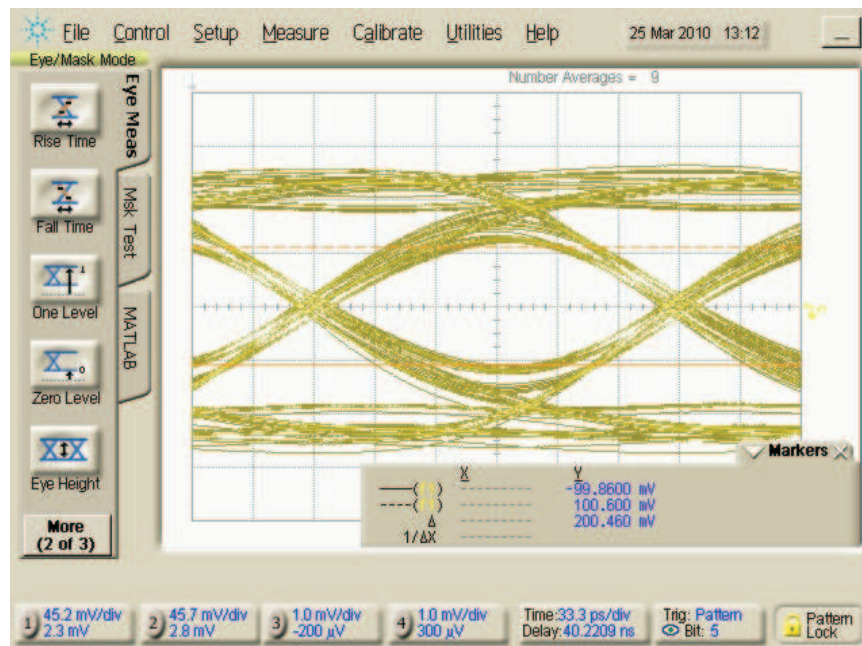


Figure 13. Input Trace = 12 Inches, 6 mil and Output USB 3 Cable Length = 4 M

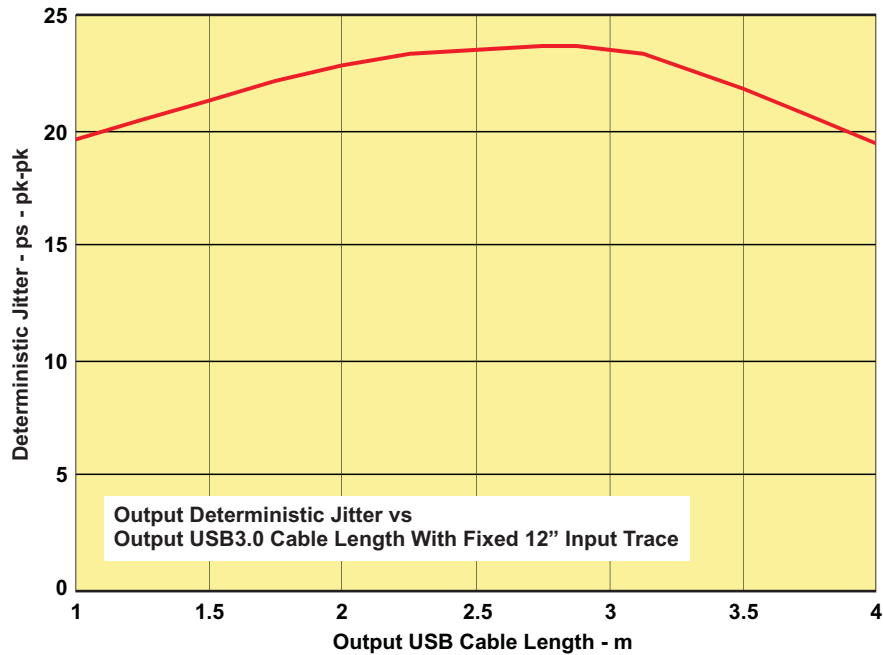


Figure 14. Jitter Performance Over Different Cable Lengths

Input Trace Length Held Constant and Output Trace Varied

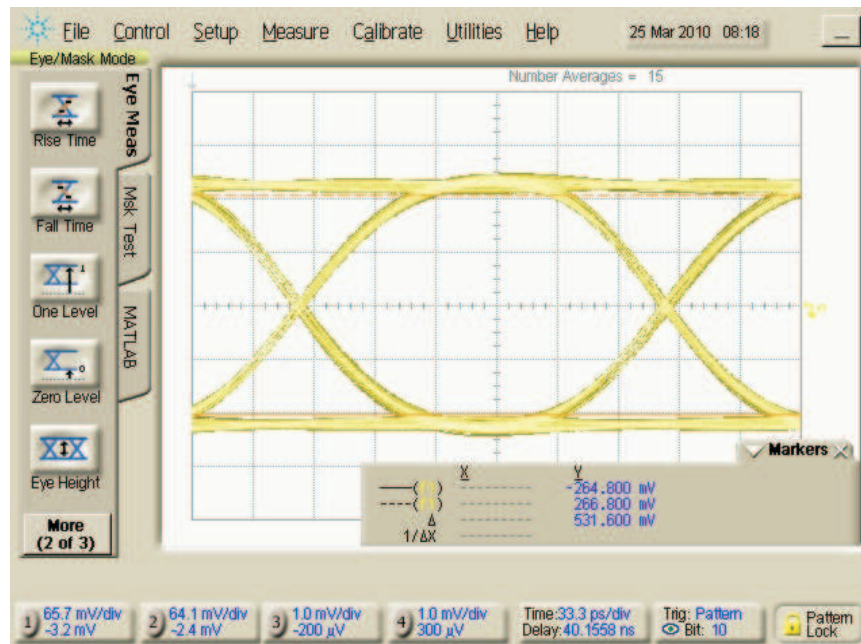


Figure 15. Input Trace = 4 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

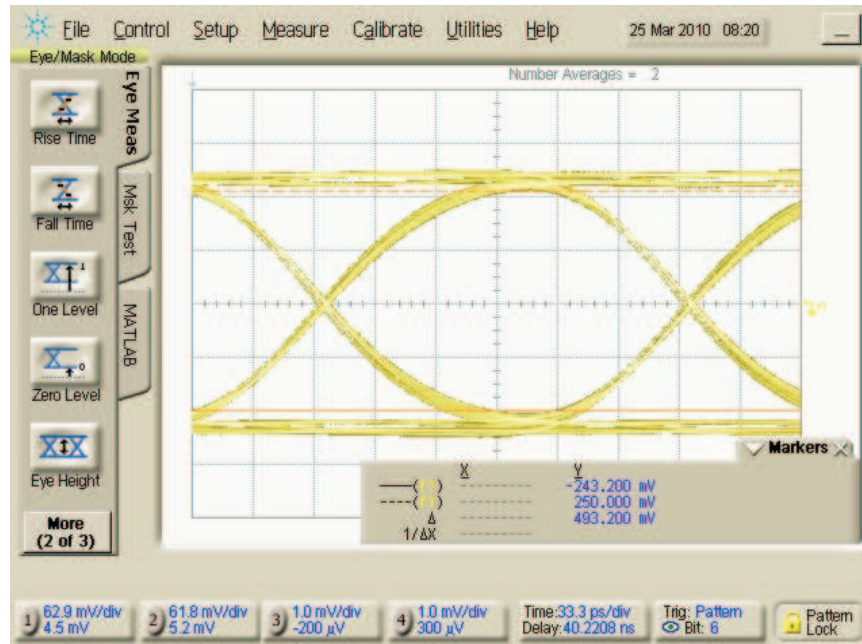


Figure 16. Input Trace = 4 Inches, 6 mil and Output Trace = 8 Inches, 6 mil

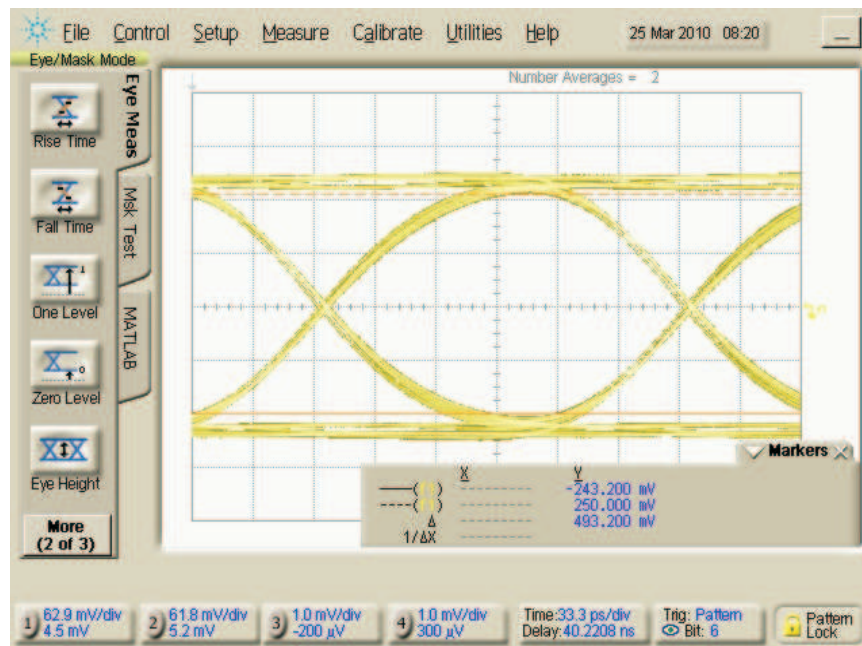


Figure 17. Input Trace = 4 Inches, 6 mil and Output Trace = 12 Inches, 6 mil

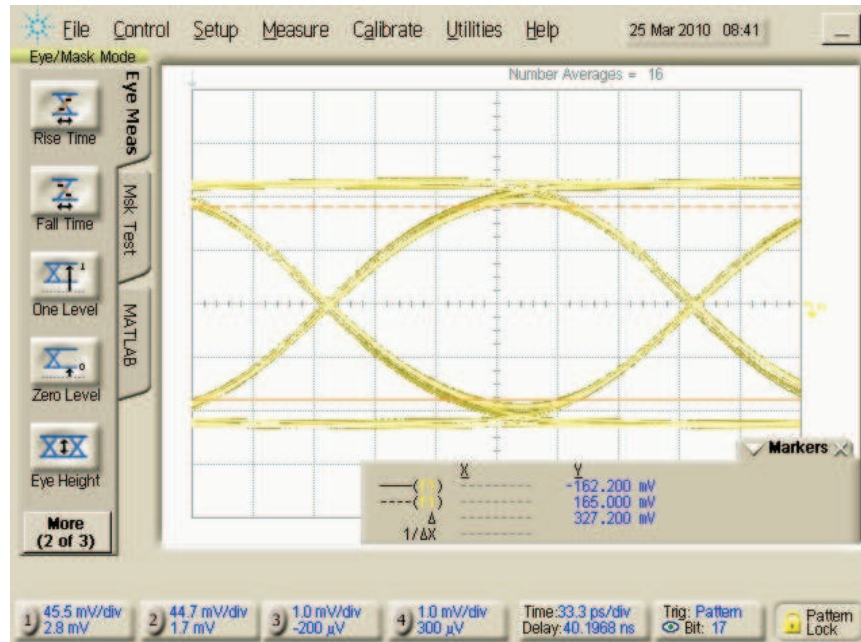


Figure 18. Input Trace = 4 Inches, 6 mil and Output Trace = 16 Inches, 6 mil

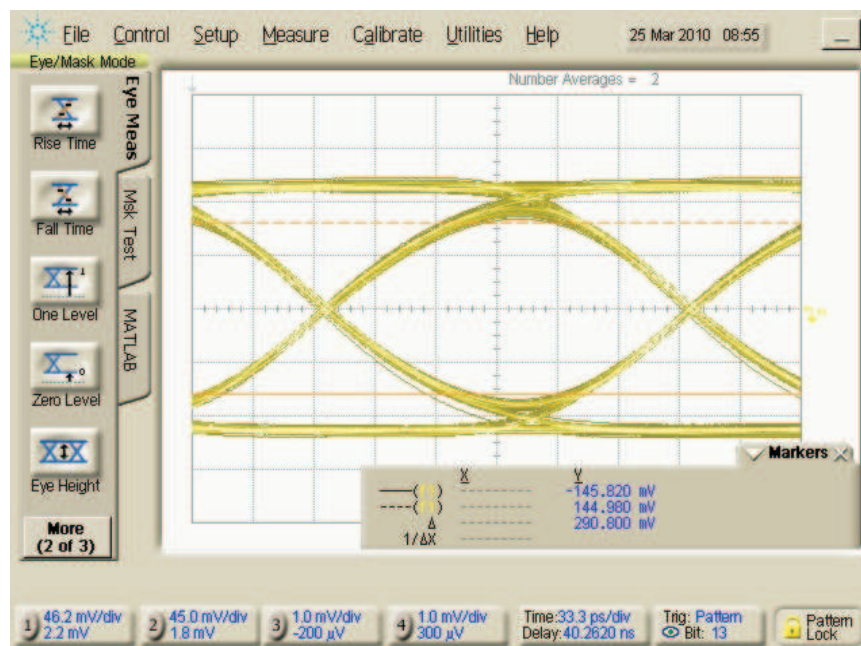


Figure 19. Input Trace = 4 Inches, 6 mil and Output Trace = 20 Inches, 6 mil



Figure 20. Jitter Performance Over Different Output Trace Lengths

Output Trace Length Held Constant and Input Trace Length Varied

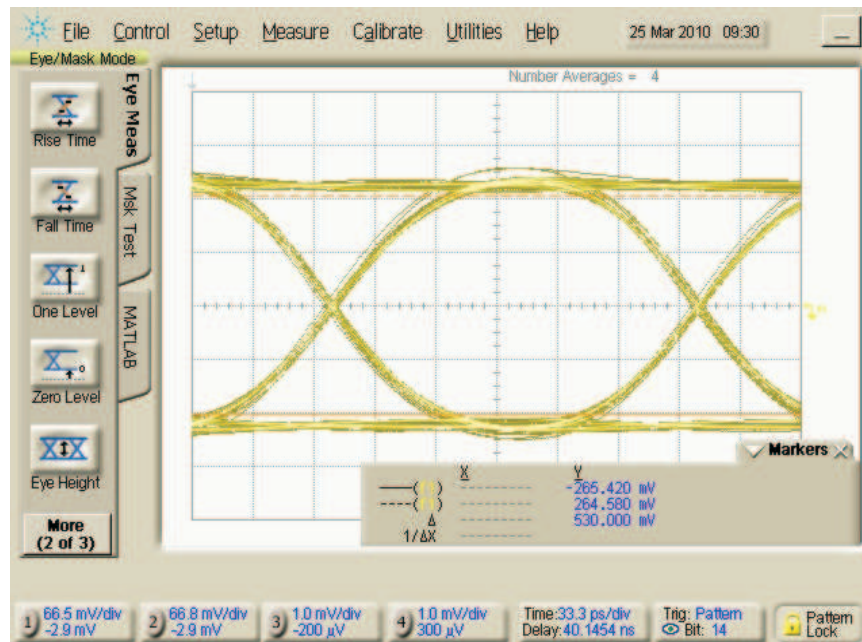


Figure 21. Input Trace = 4 Inches, 6 mil and Output Trace = 4 Inches, 6 mil



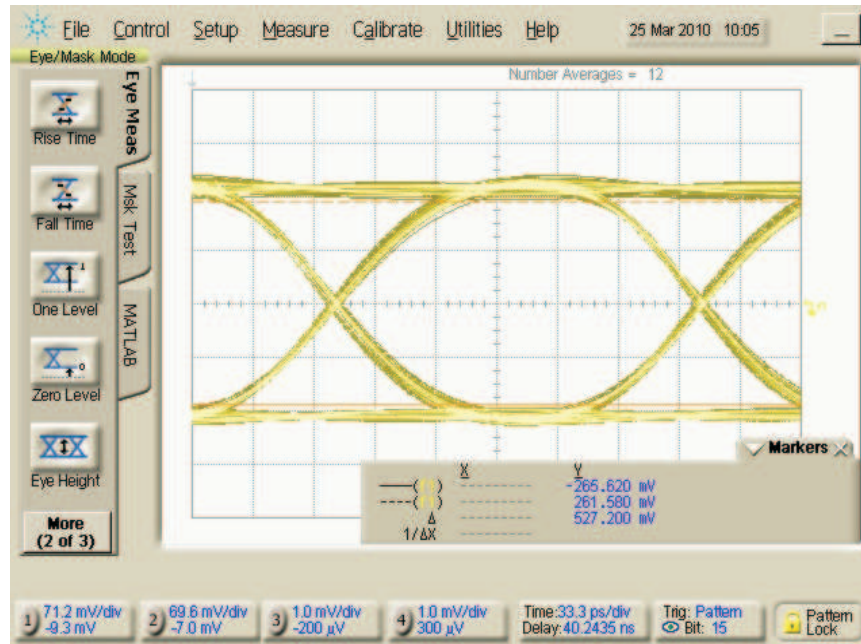


Figure 22. Input Trace = 8 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

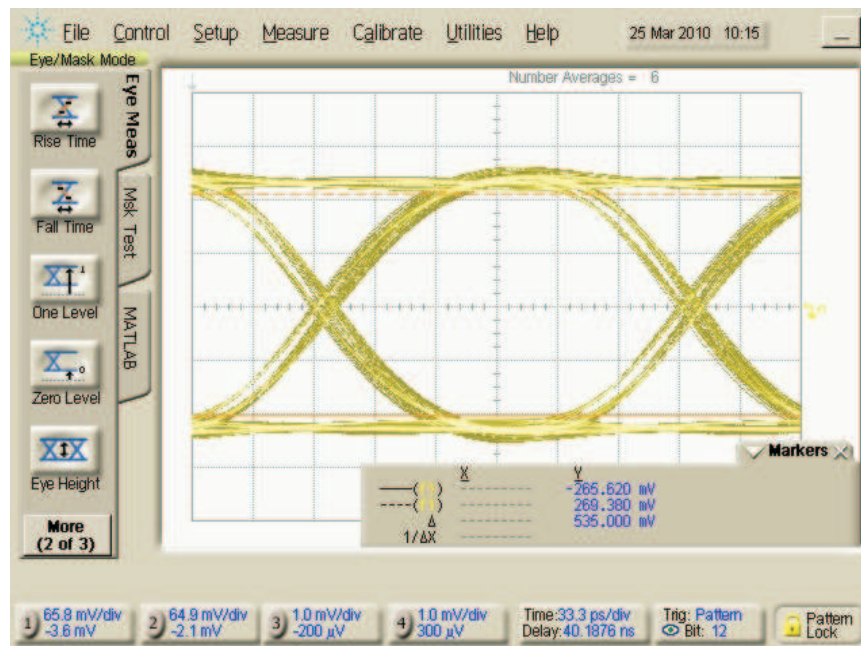


Figure 23. Input Trace = 12 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

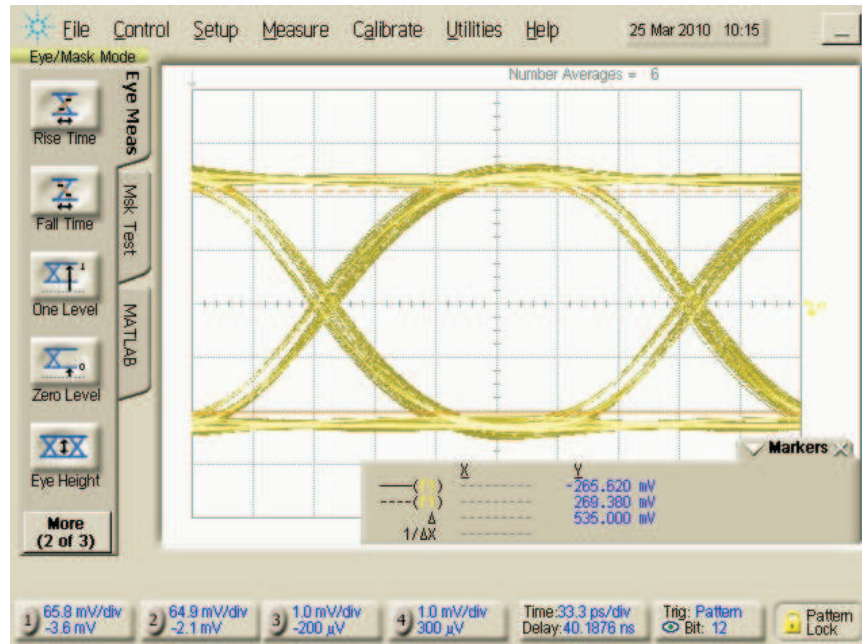


Figure 24. Input Trace = 16 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

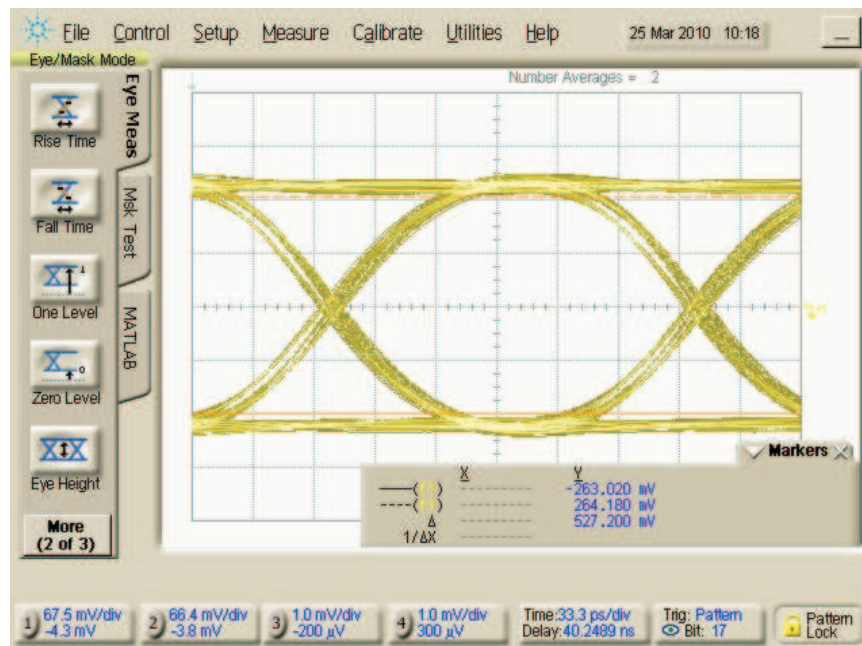


Figure 25. Input Trace = 20 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

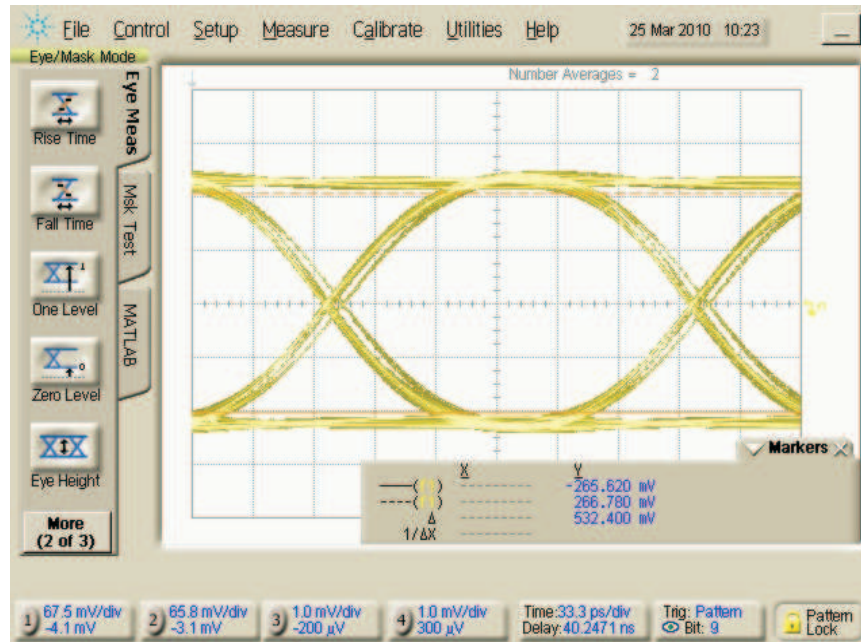


Figure 26. Input Trace = 28 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

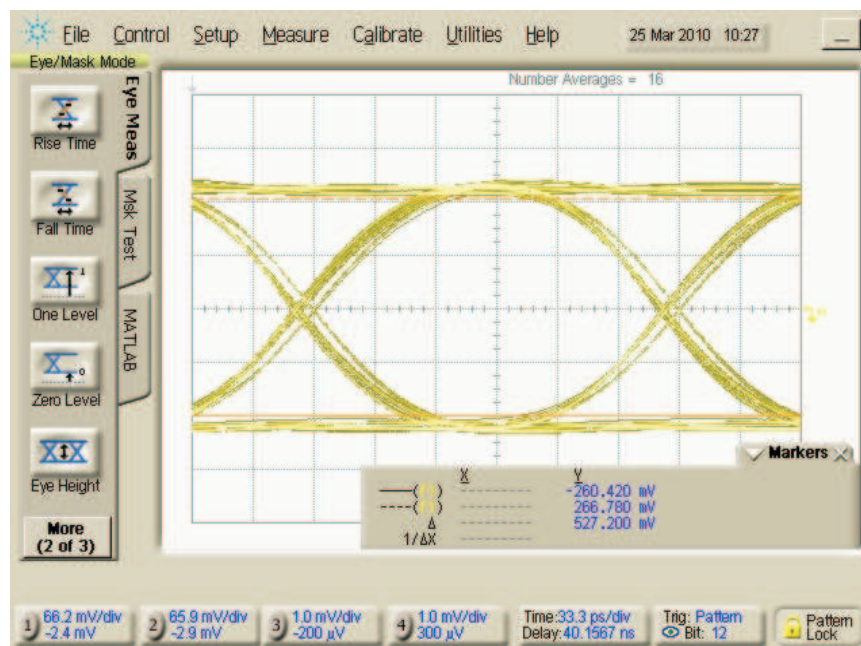


Figure 27. Input Trace = 32 Inches, 6 mil and Output Trace = 4 Inches, 6 mil

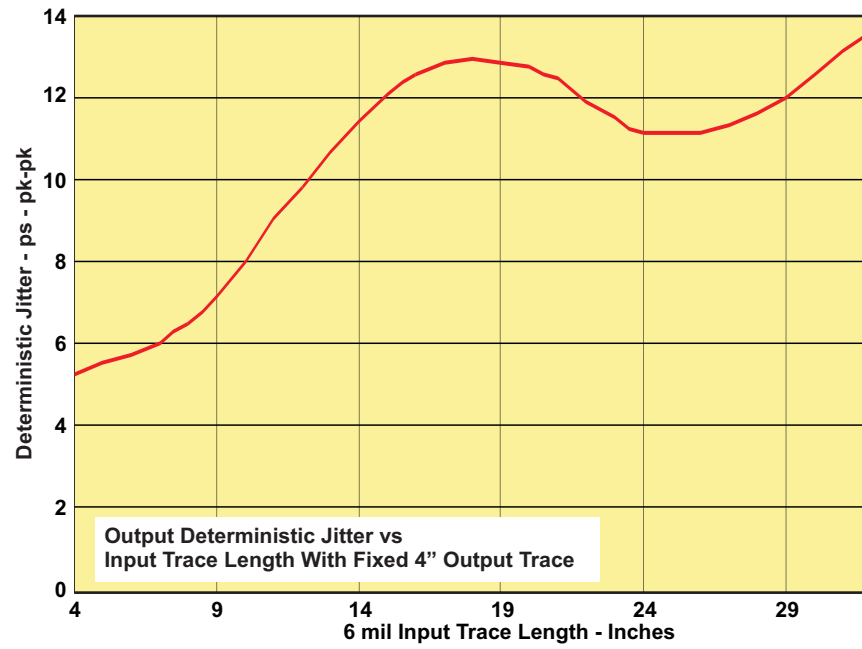


Figure 28. Jitter Performance Over Different Input Trace Lengths

---

**REVISION HISTORY**

<b>Changes from Original (April 2010 ) to Revision A</b>	<b>Page</b>
<hr/> <ul style="list-style-type: none"><li>• Changed in Table 1. Pin Description, signals: TX1+, TX1-, TX2+ and TX2- , I/O types changed from O, CML to O, VML also in Descripton, 'CML' to 'VML' .....</li></ul> <hr/>	<hr/> <b>4</b> <hr/>

**PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
SN65LVPE502RGER	ACTIVE	VQFN	RGE	24	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	
SN65LVPE502RGET	ACTIVE	VQFN	RGE	24	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)



<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**REEL DIMENSIONS**

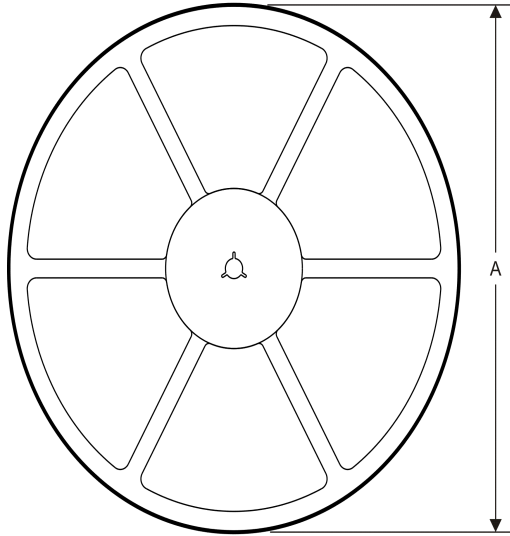

**TAPE DIMENSIONS**



A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN65LVPE502RGER	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
SN65LVPE502RGET	VQFN	RGE	24	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

**TAPE AND REEL BOX DIMENSIONS**



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN65LVPE502RGER	VQFN	RGE	24	3000	346.0	346.0	29.0
SN65LVPE502RGET	VQFN	RGE	24	250	210.0	185.0	35.0



RGE (S-PVQFN-N24)

PLASTIC QUAD FLATPACK NO-LEAD

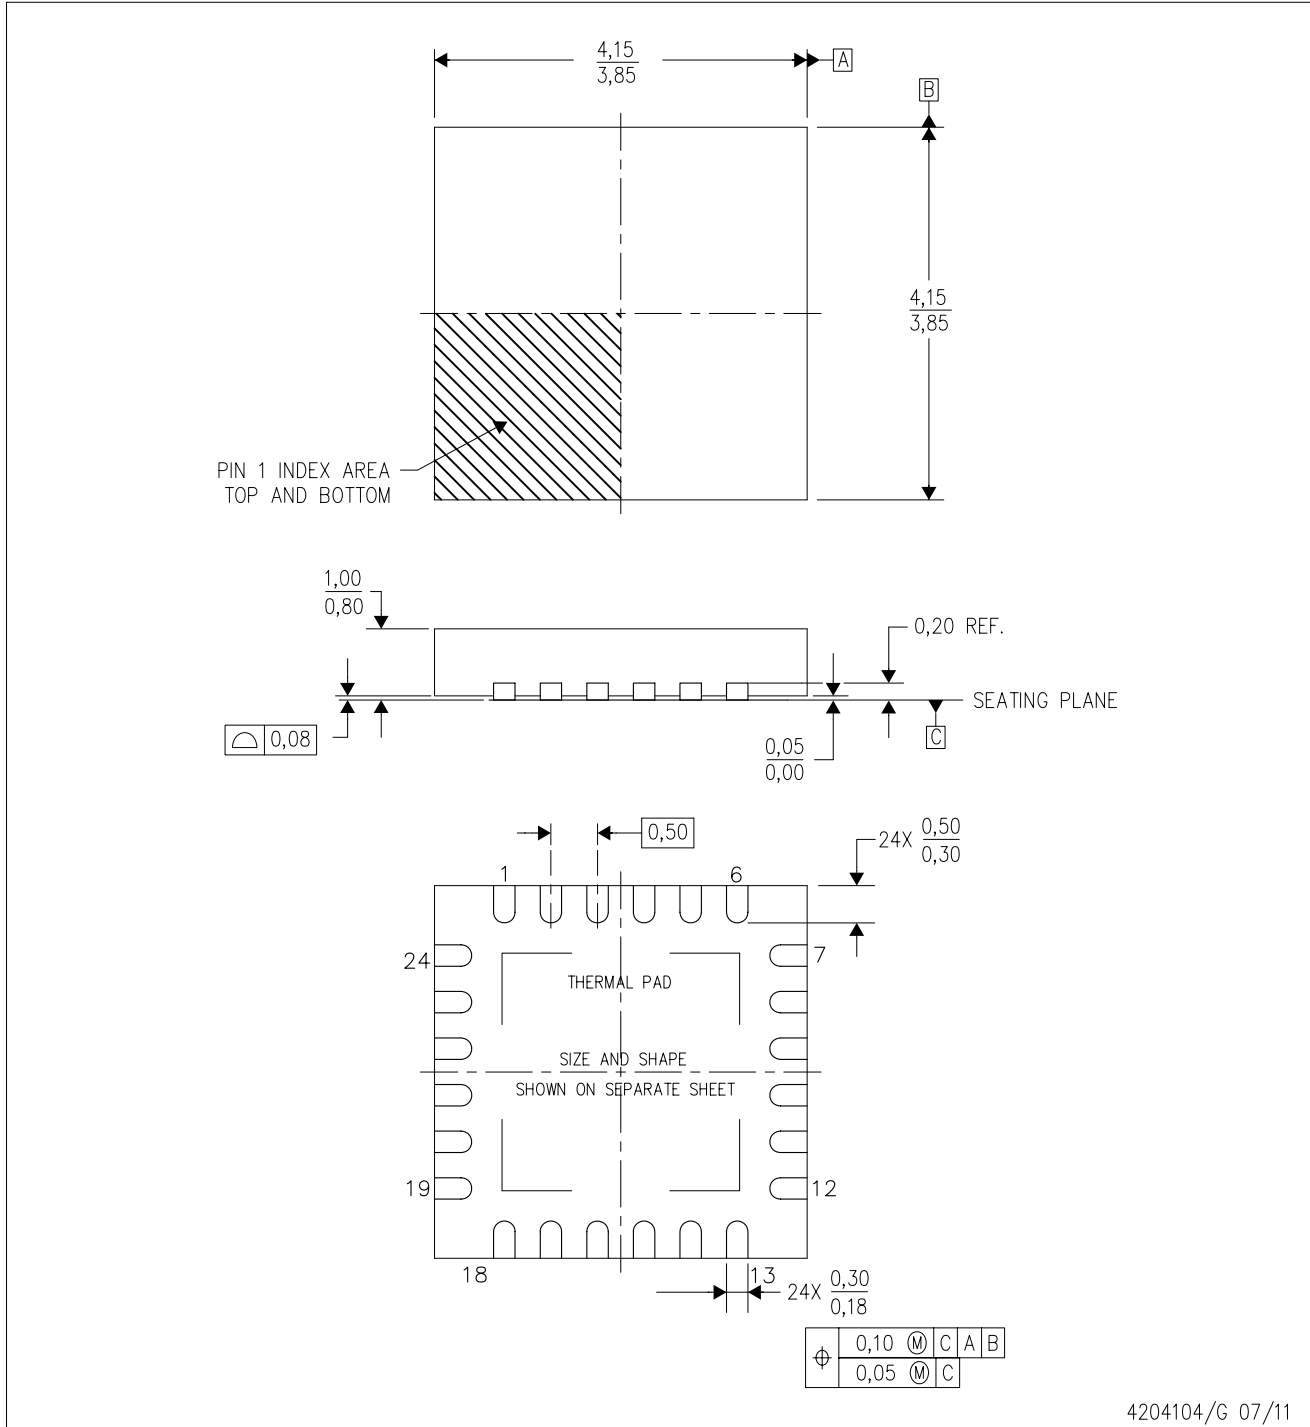

4204104/G 07/11

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - Quad Flatpack, No-Leads (QFN) package configuration.
  - The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
  - Falls within JEDEC MO-220.

## THERMAL PAD MECHANICAL DATA

RGE (S-PVQFN-N24)


PLASTIC QUAD FLATPACK NO-LEAD

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

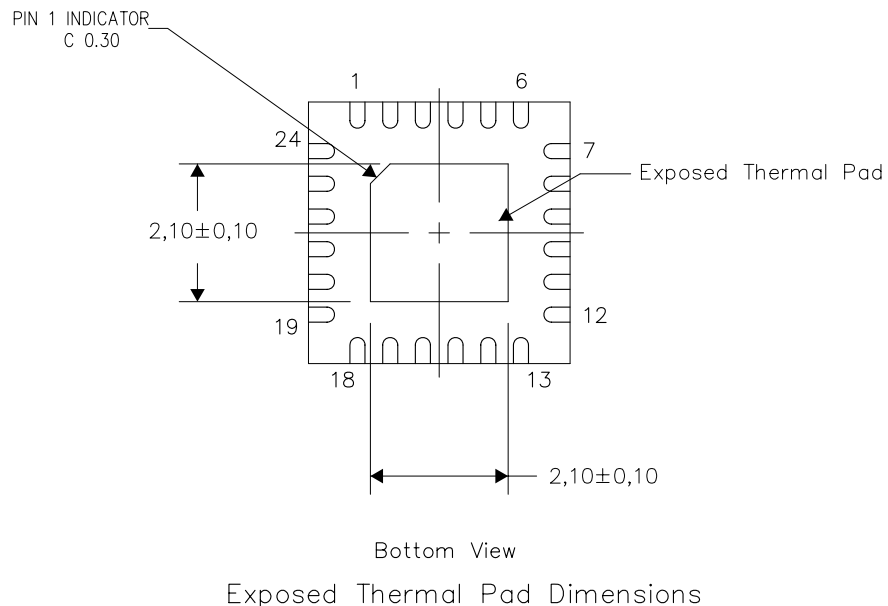


4206344-6/Z 01/12

NOTES: A. All linear dimensions are in millimeters

RGE (S-PVQFN-N24)

PLASTIC QUAD FLATPACK NO-LEAD

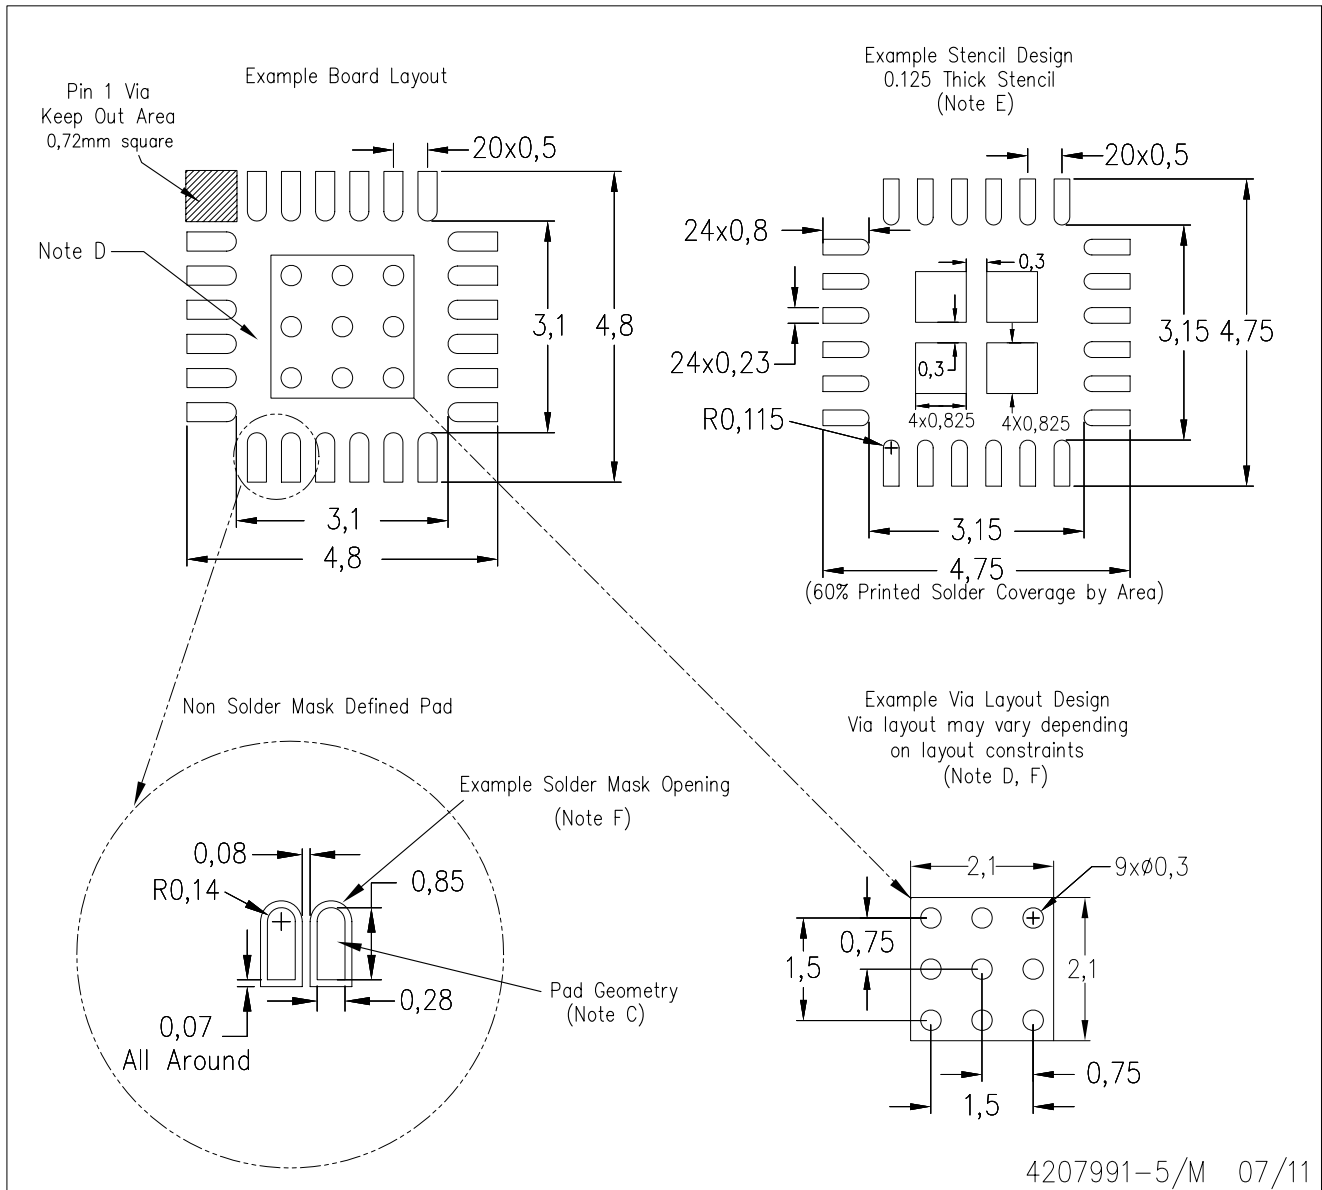

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated