
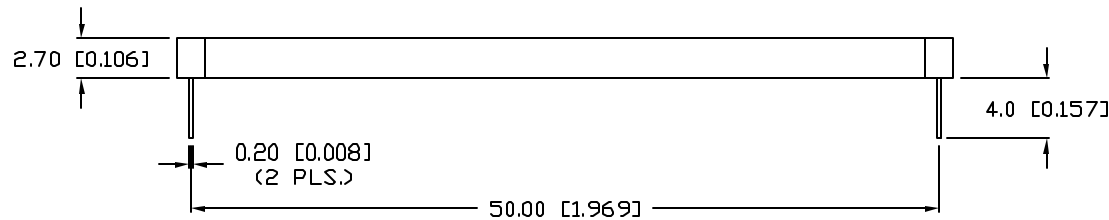



UNCONTROLLED DOCUMENT

PART NUMBER
SSB-DL5216YC

REV.
A

| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE |
|------|-------------------------------------|---------|
| A | E.C.N. #11148. | 5.11.07 |

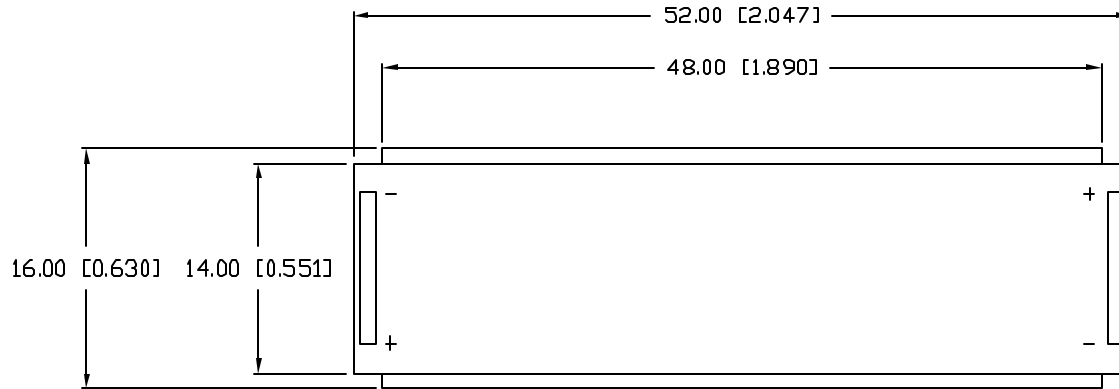

NOTES:

1. SSB-LX02YC, YELLOW LEDS. (2 PGS.)
2. SSH-DL5216W ACRYLIC REFLECTOR.

| ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}\text{C}$ PER MODULE | | | | | $I_f=20\text{ mA}$ |
|---|-------------|--------------|-----|------------------------|----------------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 585 (YELLOW) | | nm | |
| FORWARD VOLTAGE | | 4.2 | 5.0 | V_f | |
| REVERSE VOLTAGE | 10 | | | V_r | $V_r=100\mu\text{A}$ |
| LUMINOUS INTENSITY | | 25 | | cd/m^2 | $I_f=20\text{ mA}$ |
| EMITTED COLOR: | YELLOW | | | | |
| REFLECTOR FINISH: | CLEAR WHITE | | | | |

| LIMITS OF SAFE OPERATION AT 25°C PER LED | | |
|--|------------|------------------------------|
| PARAMETER | MAX | UNITS |
| PEAK FORWARD CURRENT* | 150 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 156 | W |
| DERATE FROM 25°C | -1.2 | $\text{mW}/^{\circ}\text{C}$ |
| OPERATING TEMP. | -20 TO +70 | $^{\circ}\text{C}$ |
| STORAGE TEMP. | -30 TO +80 | $^{\circ}\text{C}$ |
| SOLDERING TEMP. | +240 | $^{\circ}\text{C}$ |
| 2.0mm FROM BODY | | 3 SEC. MAX |

* $t < 10\mu\text{s}$



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= ^{+DECIMAL PRECISION} _{-0.00} MAX= ^{+0.00} _{-DECIMAL PRECISION}

| | | | |
|---|-----------------------------|--|--|
| REV. A | PART NUMBER SSB-DL5216YC | <p>CONFIDENTIAL INFORMATION</p> <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</p> <p>RELIABILITY NOTE</p> <p>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p> | <p>290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw</p> |
| 52mm x 16mm LCD BACKLIGHT, DUAL SIDED, 585nm YELLOW CHIPS, MILKY WHITE DIFFUSED REFLECTOR. | | DRAWN BY: JC | CHECKED BY: |
| | | APPROVED BY: | DATE: 8.23.02 PAGE: 1 OF 1 SCALE: N/A |