

Power Management LSI Series for Automotive Body Control



LED Driver

BD8105FV

●Description

The BD8105FV is a serial parallel control LED driver with 35V input voltage rating. Responding to the 3-line serial data, it turns the 12ch open drain output on/off. Due to its compact size, it is optimal for small spaces.

●Features

- 1) Open Drain Output
- 2) 3-line Serial Control + Enable Signal
- 3) Internal Temperature Protection Circuit (TSD)
- 4) Cascade Connection Compatible
- 5) SSOP-B20W
- 6) Internal 12ch Power Transistor

●Applications

These ICs can be used with car and consumer electronic.

●Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Value	Unit
Power Supply Voltage	VCC	7	V
Output Voltage (Pin No : 4~9, 11~16)	VDmax	35	V
Input Voltage (Pin No : 1, 2, 3, 17, 18)	VIN	-0.3~VCC	V
Power Dissipation	Pd	1187*	mW
Operating Temperature Range	Topr	-40~+105	°C
Storage Temperature Range	Tstg	-55~+150	°C
Drive Current (DC)	IomaxD	50	mA
Drive Current (Pulse)	IomaxP	150**	mA
Junction Temperature	Tjmax	150	°C

* Pd decreased at 9.50mW/°C for temperatures above Ta=25°C, mounted on 70×70×1.6mm Glass-epoxy PCB.

** Do not however exceed Pd. Time to impress ≤ 200msec

●Operational Conditions (Ta=-40~105°C)

Item	Symbol	Standard Value			Unit
		Min	Typ	Max	
Power Supply Voltage	Vcc	4.5	5	5.5	V
Drive Current	Io	-	20	40	mA

* This product is not designed for protection against radioactive rays.

●Electrical Characteristics (Unless specified, Ta=-40~105°C Vcc=4.5~5.5V)

Item	Symbol	Standard Value			Unit	Conditions
		Min	Typ	Max		
【Output D0~D11】 (Pin No : 4~9, 11~16)						
ON Resistor	RON	-	6	12	Ω	ID=20mA
Output leakage current	IDL	-	0	5	uA	VD=34V
【Logic input】 (Pin No : 1, 2, 3, 17, 18)						
Upper limit threshold voltage	VTH	Vcc ×0.8	-	-	V	
Bottom limit threshold voltage	VTL	-	-	Vcc ×0.2	V	
Serial clock frequency	FCLK	-	-	1	MHz	
Input Current	IIN	20	50	100	uA	VIN=5V
Input leakage Current	IINL	-	0	5	uA	VIN=0V
【WHOLE】						
Circuit Current	ICC	-	0.3	5	mA	Serial Data Input, VCC=5V,CLK=500KHz, SEROUT=OPEN
Static Current	ISTN	-	0	50	uA	RST_B=OPEN, SEROUT=OPEN
【SER OUT】 (Pin No. : 20)						
Output Voltage high	VOH	4.6	4.8	-	V	VCC=5V, ISO=-5mA
Output voltage Low	VOL	-	0.2	0.4	V	VCC=5V, ISO=5mA

* This product is not designed for protection against radioactive rays.

● Electrical Characteristic Diagrams (Unless otherwise specified Ta=25°C)

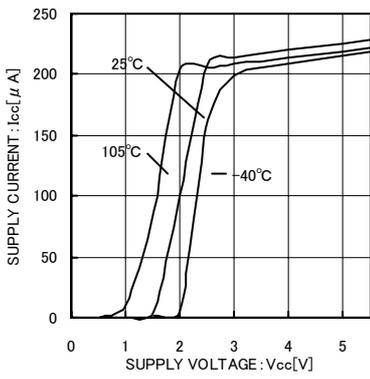


Fig.1 Circuit current 1

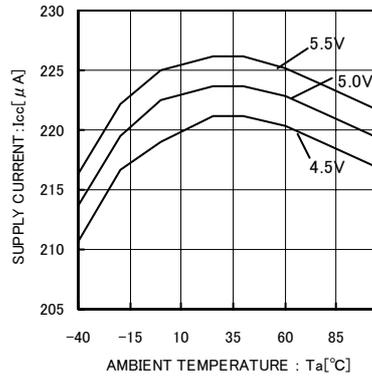


Fig.2 Circuit current 2

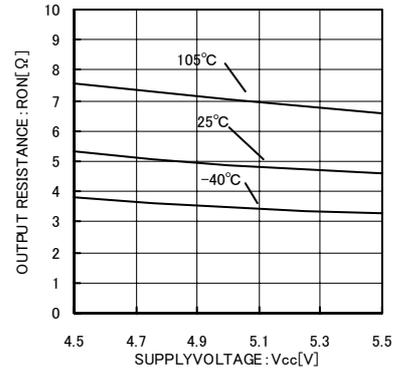


Fig.3 Dxx on resistance 1 (at $I_{DD}=20mA$)

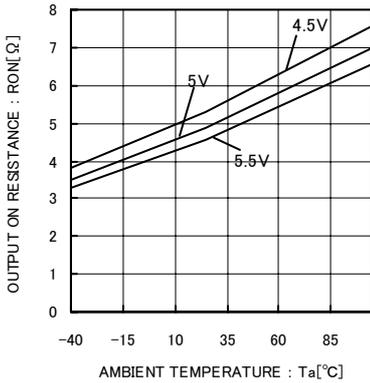


Fig.4 Dxx on resistance 2 (at $I_{DD}=20mA$)

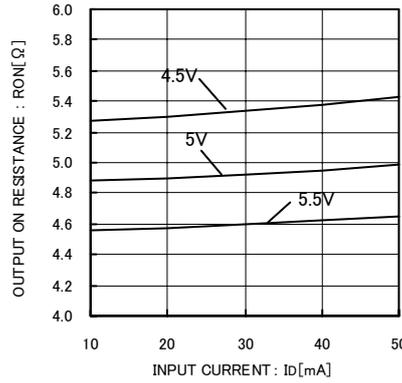


Fig.5 Dxx on resistance

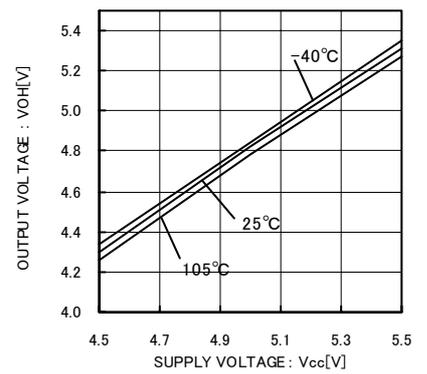


Fig.6 SEROUT high side voltage 1 (at $I_{SO}=-5mA$)

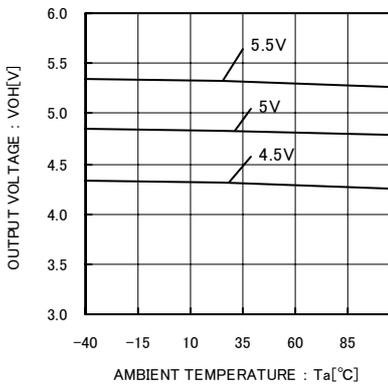


Fig.7 SEROUT high side voltage 2 (at $I_{SO}=-5mA$)

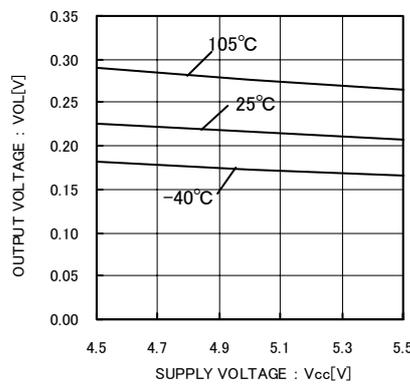


Fig.8 SEROUT low side voltage 1 (at $I_{SO}=5mA$)

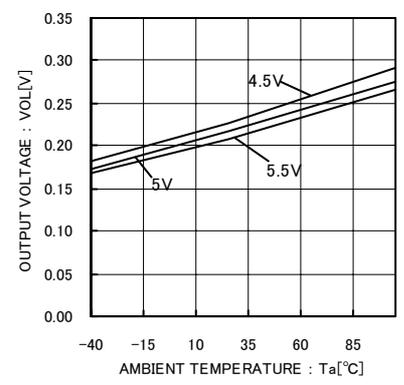


Fig.9 SEROUT low side voltage 2 (at $I_{SO}=5mA$)

●Block Diagram

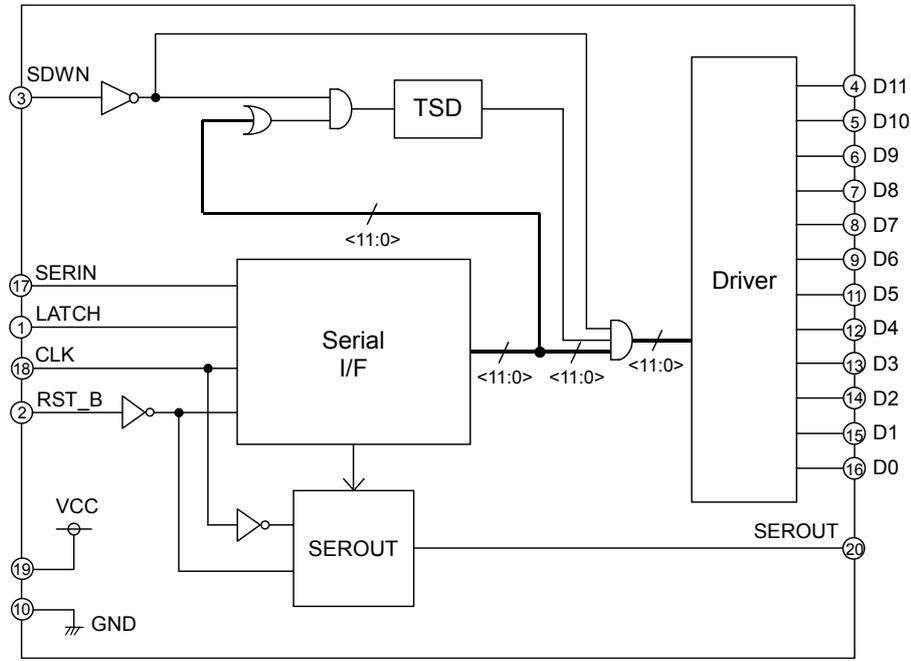


Fig.10

●Pin Setup Diagram
BD8105FV (SSOP-B20W)

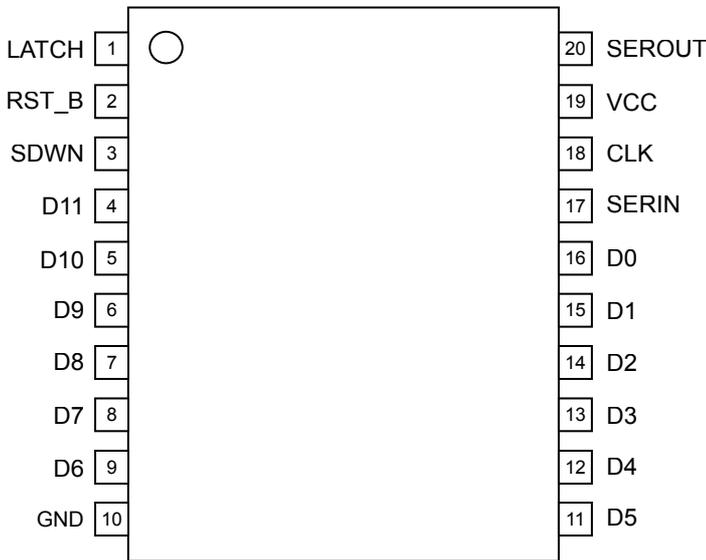


Fig.11

●Terminal Number - Terminal Name

Pin Number	Terminal Name	Function
1	LATCH	Latch Signal Input Terminal (H: Latches Data)
2	RST_B	Reset Reversal Input Terminal (L: FF Data 0)
3	SDWN	Shutdown Input Terminal (H: Output Off)
4	D11	Drain Output Terminal 11
5	D10	Drain Output Terminal 10
6	D9	Drain Output Terminal 9
7	D8	Drain Output Terminal 8
8	D7	Drain Output Terminal 7
9	D6	Drain Output Terminal 6
10	GND	Ground Terminal
11	D5	Drain Output Terminal 5
12	D4	Drain Output Terminal 4
13	D3	Drain Output Terminal 3
14	D2	Drain Output Terminal 2
15	D1	Drain Output Terminal 1
16	D0	Drain Output Terminal 0
17	SERIN	Serial Data Input Terminal
18	CLK	Clock Input Terminal
19	VCC	Supply Voltage Input Terminal
20	SEROUT	Serial Data Output Terminal

●Block Operation

1) Serial I/F

The I/F is a 3-line serial (LATCH, CLK, SERIN) style.

12-bit output ON/OFF can be set-up. This is composed of shift register. + 12-bit register.


2) Driver

It is a 12-bit open drain output.

3) TSD (Thermal Shut Down)

To prevent heat damage and overheating, when the chip temperature goes over approximately 175°C, the output turns off. When the temperature goes back down, normal operation resumes. However, the intended use of the temperature protection circuit is to protect the IC, so please construct thermal design with the junction temperature Tjmax under 150°C.

●Application Circuit

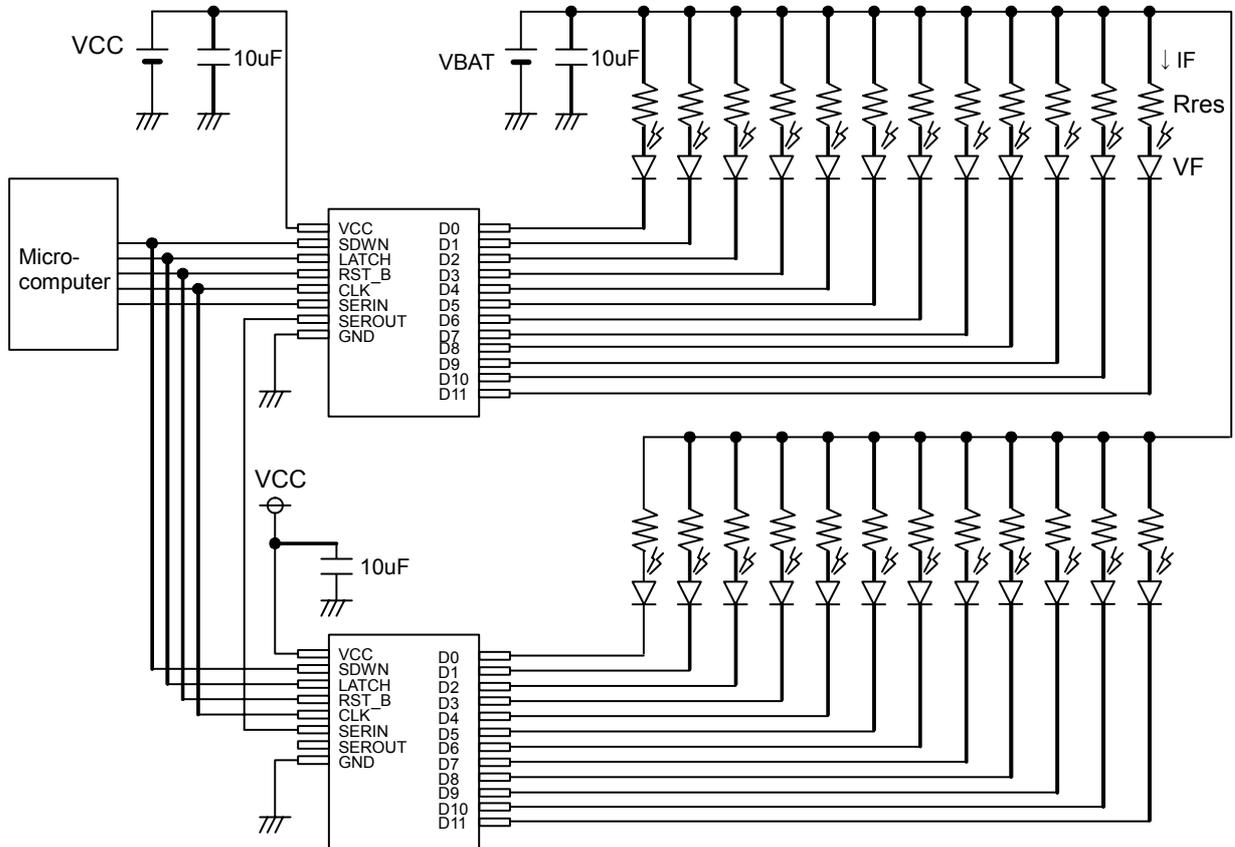

$$IF = \frac{VBAT - VF}{Rres + RON}$$

Fig.12

3) Enable Signal

By applying voltage at least $VCC \times 0.8$ or more to the SDWN terminal, D0 (16 pin)~D11 (4 pin) become open forcibly. At this time, the temperature protection circuit (TSD) stops. D11~D0 become PWM operation by inputting PWM to SDWN(3 pin).

4) SEROUT

A cascade connection can be made (connecting at least 2 or more IC's in serial).

Serial signal input from SERIN is transferred into receiver IC by the fall edge of the CLK signal.

Since this functionality gives enough margins for the setup time prior to the rise edge of the CLK signal on the receiver IC (using the exact same CLK signal of sender IC), the application reliability can be improved as cascade connection functionality.

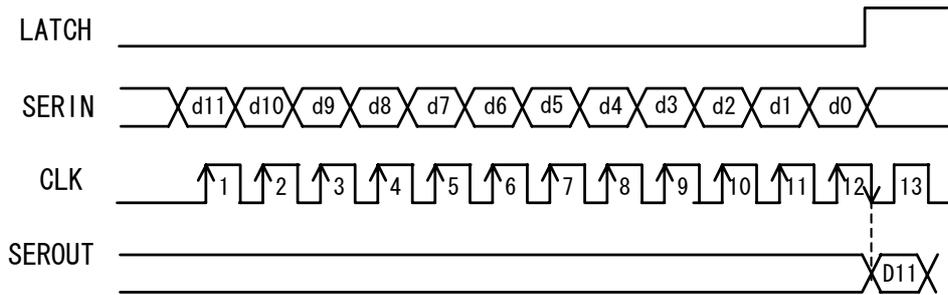


Fig.14

● Cascade Connection

By using (at least) 2 ICs, each IC's D11~D0, at (at least) 24ch, can be controlled by the 24-bit SERIN signal. The serial data input to the sender IC can be transferred to the receiver IC by inputting 12CLK to the CLK terminal.

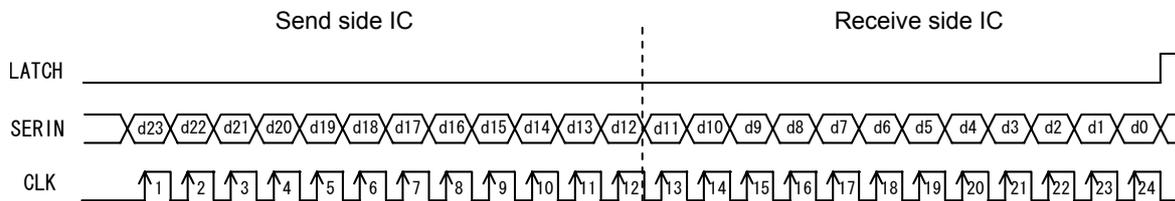


Fig.15

● INPUT SIGNAL'S TIMING CHART

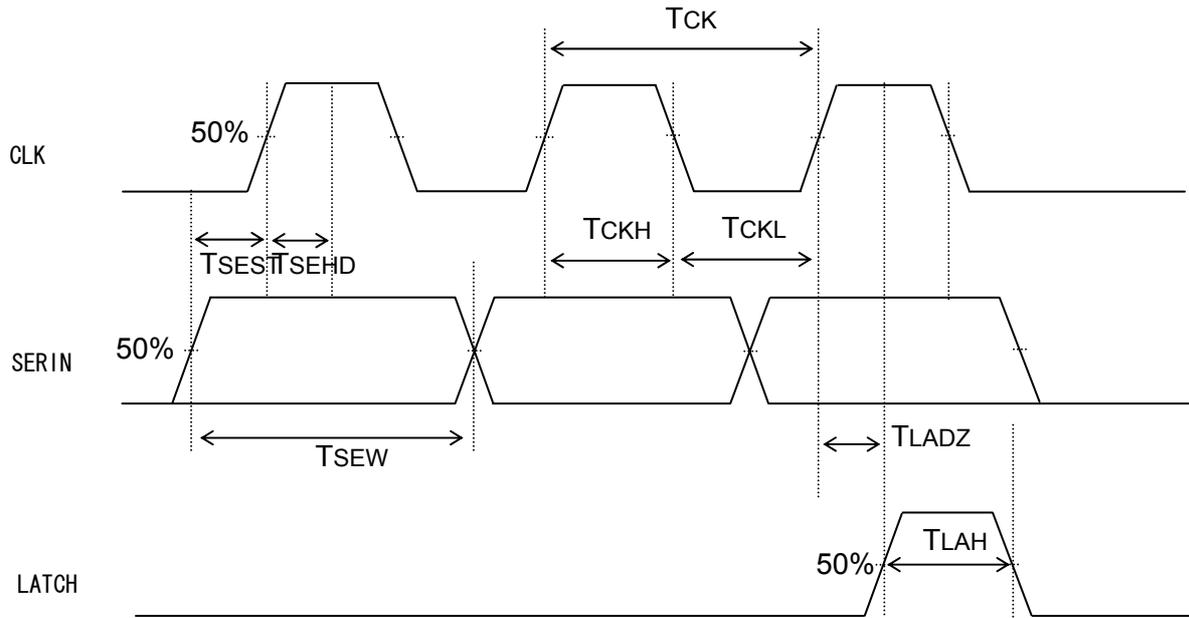


Fig.16

● INPUT SIGNAL'S TIMING RULE (Ta=-40~105°C Vcc=4.5~5.5V)

Parameter	Symbol	Min	Unit
CLK period	TCK	1000	ns
CLK high pulse width	TCKH	480	ns
CLK low pulse width	TCKL	480	ns
SERIN high and low pulse width	TSEW	980	ns
SERIN setup time prior to CLK rise	TSEST	150	ns
SERIN hold time after CLK fall	TSEHD	150	ns
LATCH high pulse time	TLAH	480	ns
Last CLK rise to LATCH rise	TLADZ	250	ns

● OUTPUT SIGNAL'S DELAY CHART

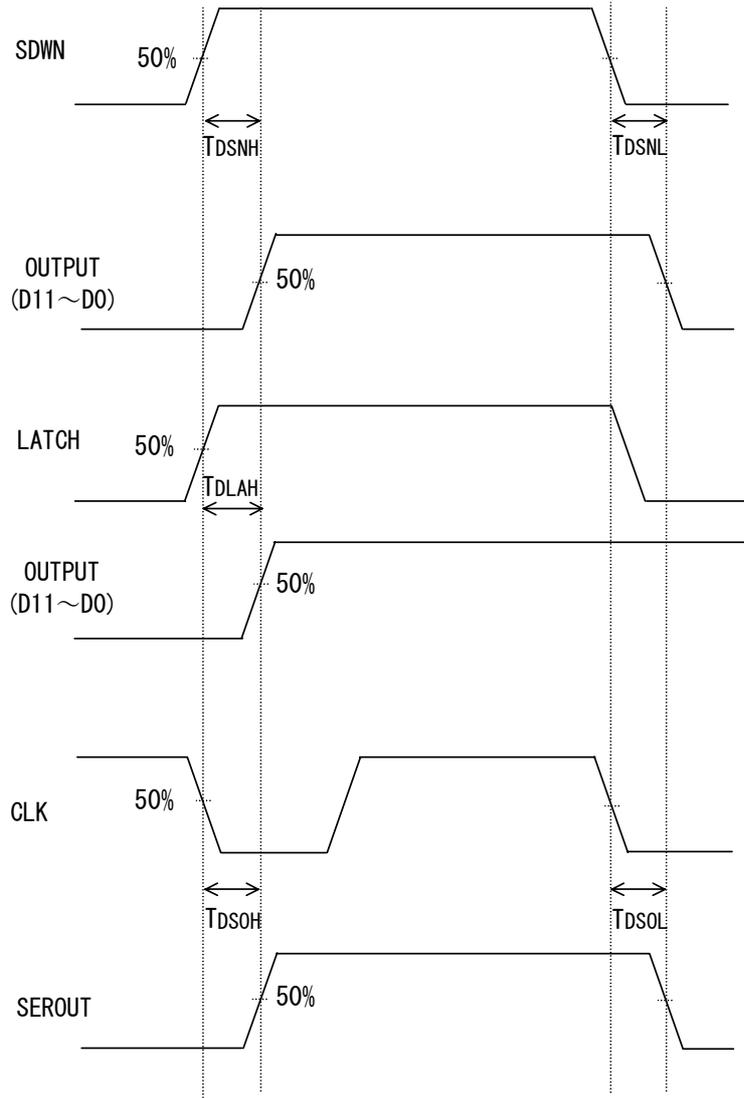


Fig.17

● OUTPUT SIGNAL'S DELAY TIME (Ta=-40~105°C Vcc=4.5~5.5V)

Parameter	Symbol	Max	Unit
SDWN Switching Time(L→H)	TDSNH	300	ns
SDWN Switching Time(H→L)	TDSNL	300	ns
LATCH Switching Delay Time	TDLAH	300	ns
SEROUT Propagation Delay Time(L→H)	TDSOH	350	ns
SEROUT Propagation Delay Time (H→L)	TDSOL	350	ns

● INPUT/OUTPUT EQUIVALENT CIRCUIT (PIN NAME)

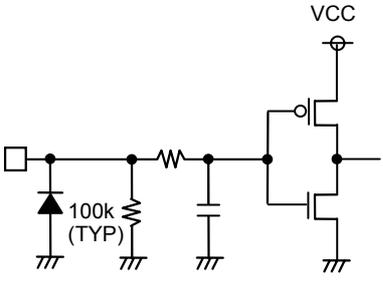
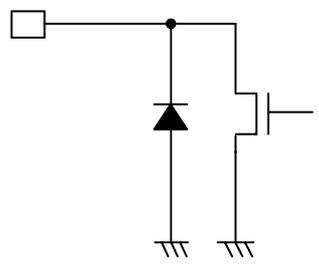
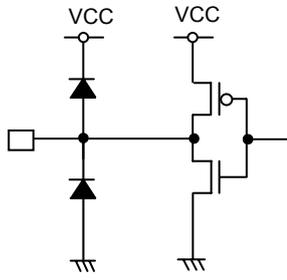
<p>1PIN (LATCH) 2PIN (RST_B) 3PIN (SDWN) 17PIN (SERIN) 18PIN (CLK)</p>	<p>4PIN (D11), 5PIN (D10) 6PIN (D9), 7PIN (D8) 8PIN (D7), 9PIN (D6) 11PIN (D5), 12PIN (D4) 13PIN (D3), 14PIN (D2) 15PIN (D1), 16PIN (D0)</p>	<p>20PIN (SEROUT)</p>
		

Fig.18

● Operation Notes

(1) Absolute maximum ratings

Use of the IC in excess of absolute maximum ratings such as the applied voltage or operating temperature range may result in IC damage. Assumptions should not be made regarding the state of the IC (short mode or open mode) when such damage is suffered.

A physical safety measure such as a fuse should be implemented when use of the IC in a special mode where the absolute maximum ratings may be exceeded is anticipated.

(2) Reverse connection of a power supply connector

If the connector of power is wrong connected, it may result in IC breakage. In order to prevent the breakage from the wrong connection, the diode should be connected between external power and the power terminal of IC as protection solution.

(3) GND potential

Ensure a minimum GND pin potential in all operating conditions.

(4) Setting of heat

Use a setting of heat that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.

(5) Pin short and mistake fitting

Use caution when orienting and positioning the IC for mounting on printed circuit boards. Improper mounting may result in damage to the IC. Use of the IC in excess of absolute maximum ratings such as the applied voltage or operating temperature range may result in IC damage.

(6) Actions in strong magnetic field

Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.

(7) Thermal shutdown circuit(TSD)

This IC built-in a Thermal shutdown circuit (TSD circuit). If Chip temperature becomes 175°C(TYP.), make the output an Open state. Eventually, warmly clearing the circuit is decided by the condition of whether the heat excesses over the assigned limit, resulting the cutoff of the circuit of IC, and not by the purpose of preventing and ensuring the IC. Therefore, the warm switch-off should not be applied in the premise of continuous employing and operation after the circuit is switched on.

(8) Testing on application boards

When testing the IC on an application board, connecting a capacitor to a pin with low impedance subjects the IC to stress.

Always discharge capacitors after each process or step. Ground the IC during assembly steps as an antistatic measure, and use similar caution when transporting or storing the IC. Always turn the IC's power supply off before connecting it to or removing it from a jig or fixture during the inspection process


(9) IC terminal input

This monolithic IC contains P+ isolation and P substrate layers between adjacent elements in order to keep them isolated. P/N junctions are formed at the intersection of these P layers with the N layers of other elements to create a variety of parasitic elements.

For example, when a resistor and transistor are connected to pins. (See the chart below.)

- the P/N junction functions as a parasitic diode when GND > (Pin A) for the resistor or GND > (Pin B) for the transistor (NPN).
- Similarly, when GND > (Pin B) for the transistor (NPN), the parasitic diode described above combines with the N layer of other adjacent elements to operate as a parasitic NPN transistor.


The formation of parasitic elements as a result of the relationships of the potentials of different pins is an inevitable result of the IC's architecture. The operation of parasitic elements can cause interference with circuit operation as well as IC malfunction and damage. For these reasons, it is necessary to use caution so that the IC is not used in a way that will trigger the operation of parasitic elements, such as by the application of voltages lower than the GND (PCB) voltage to input pins.

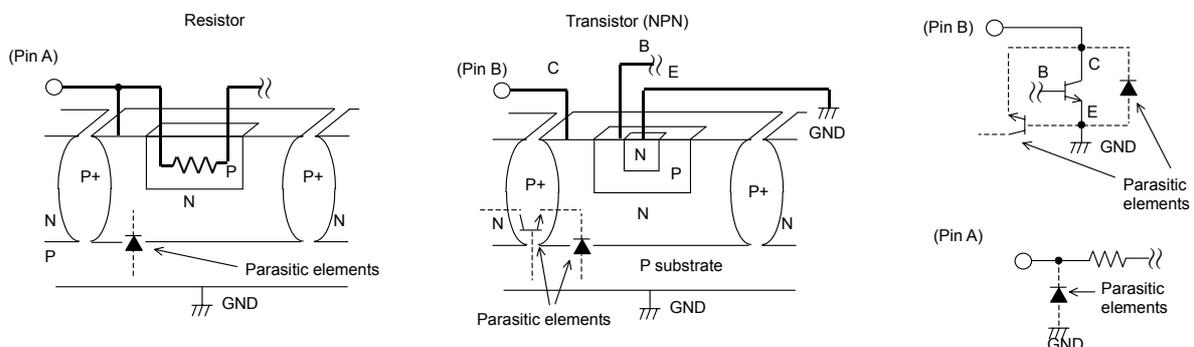

(10) Ground wiring patterns

When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a single ground point at the application's reference point so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring patterns of any external components.

●Selecting a Model Name When Ordering

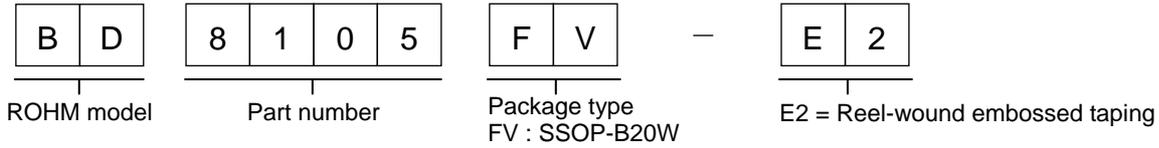

SSOP-B20W

<Dimension>

(Unit:mm)

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2000pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

*When you order , please order in times the amount of package quantity.

- The contents described herein are correct as of December, 2007
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD. is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Contact us for further information about the products.

Excellence in Electronics



ROHM CO., LTD.

21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: +81-75-311-2121 FAX: +81-75-315-0172
URL: <http://www.rohm.com>

Published by
LSI Business Promotion Dept.

<p>San Diego TEL: +1-858-625-3630</p> <p>Atlanta TEL: +1-770-754-5972</p> <p>Boston TEL: +1-978-371-0382</p> <p>Chicago TEL: +1-847-368-1006</p> <p>Dallas TEL: +1-469-287-5366</p> <p>Denver TEL: +1-303-708-0908</p> <p>Detroit TEL: +1-248-348-9920</p> <p>Nashville TEL: +1-615-620-6700</p> <p>Mexico TEL: +52-33-3123-2001</p> <p>Düsseldorf TEL: +49-2154-9210</p> <p>Munich TEL: +49-8161-48310</p> <p>Stuttgart TEL: +49-711-72723710</p> <p>France TEL: +33-1-5697-3060</p> <p>United Kingdom TEL: +44-1-908-306700</p> <p>Denmark TEL: +45-3694-4739</p> <p>Barcelona TEL: +34-9375-24320</p> <p>Hungary TEL: +36-1-4719338</p> <p>Poland TEL: +48-22-5757213</p> <p>Russia TEL: +7-95-980-6755</p> <p>Seoul TEL: +82-2-8182-700</p> <p>Masan TEL: +82-55-240-6234</p> <p>Dalian TEL: +86-411-8230-8549</p> <p>Beijing TEL: +86-10-8525-2483</p> <p>Tianjin TEL: +86-22-23029181</p>	<p>TEL: +1-858-625-3630</p> <p>FAX: +1-770-754-0691</p> <p>FAX: +1-928-438-7164</p> <p>FAX: +1-847-368-1008</p> <p>FAX: +1-469-362-7973</p> <p>FAX: +1-303-708-0858</p> <p>FAX: +1-248-348-9942</p> <p>FAX: +1-615-620-6702</p> <p>FAX: +52-33-3123-2002</p> <p>FAX: +49-2154-921400</p> <p>FAX: +49-8161-483120</p> <p>FAX: +49-711-72723720</p> <p>FAX: +33-1-5697-3080</p> <p>FAX: +44-1-908-235788</p> <p>FAX: +45-3694-4789</p> <p>FAX: +34-9375-24410</p> <p>FAX: +36-1-4719339</p> <p>FAX: +48-22-5757001</p> <p>FAX: +7-95-937-8290</p> <p>FAX: +82-2-8182-715</p> <p>FAX: +82-55-240-6236</p> <p>FAX: +86-411-8230-8537</p> <p>FAX: +86-10-8525-2489</p> <p>FAX: +86-22-23029183</p>	<p>Shanghai TEL: +86-21-6279-2727</p> <p>Hangzhou TEL: +86-571-87658072</p> <p>Nanjing TEL: +86-25-8689-0015</p> <p>Ningbo TEL: +86-574-87654201</p> <p>Qingdao TEL: +86-532-5779-312</p> <p>Suzhou TEL: +86-512-6807-1300</p> <p>Wuxi TEL: +86-510-82702693</p> <p>Shenzhen TEL: +86-755-8307-3008</p> <p>Dongguan TEL: +86-769-8393-3320</p> <p>Fuzhou TEL: +86-591-8801-8698</p> <p>Guangzhou TEL: +86-20-8364-9796</p> <p>Huizhou TEL: +86-752-205-1054</p> <p>Xiamen TEL: +86-592-238-5705</p> <p>Zhuhai TEL: +86-756-3232-480</p> <p>Hong Kong TEL: +852-2-740-6262</p> <p>Taipei TEL: +886-2-2500-6956</p> <p>Kaohsiung TEL: +886-7-237-0881</p> <p>Singapore TEL: +65-6332-2322</p> <p>Philippines TEL: +63-2-807-6872</p> <p>Thailand TEL: +66-2-254-4890</p> <p>Kuala Lumpur TEL: +60-3-7958-8355</p> <p>Penang TEL: +60-4-2286453</p> <p>Kyoto TEL: +81-75-365-1218</p> <p>Yokohama TEL: +81-45-476-2290</p>	<p>FAX: +86-21-6247-2066</p> <p>FAX: +86-571-87658071</p> <p>FAX: +86-25-8689-0393</p> <p>FAX: +86-574-87654208</p> <p>FAX: +86-532-5779-653</p> <p>FAX: +86-512-6807-2300</p> <p>FAX: +86-510-82702992</p> <p>FAX: +86-755-8307-3003</p> <p>FAX: +86-769-8398-4140</p> <p>FAX: +86-591-8801-8690</p> <p>FAX: +86-20-8364-9707</p> <p>FAX: +86-752-205-1059</p> <p>FAX: +86-592-239-8380</p> <p>FAX: +86-756-3232-460</p> <p>FAX: +852-2-375-8971</p> <p>FAX: +886-2-2503-2869</p> <p>FAX: +886-7-238-7332</p> <p>FAX: +65-6332-5662</p> <p>FAX: +63-2-809-1422</p> <p>FAX: +66-2-256-6334</p> <p>FAX: +60-3-7958-8377</p> <p>FAX: +60-4-2286452</p> <p>FAX: +81-75-365-1228</p> <p>FAX: +81-45-476-2295</p>
---	---	---	--

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp