

MEAN WELL 30-60W SINGLE OUTPUT LED POWER SUPPLY WITH PFC FUNCTION

Features:

- Short circuit, Overload, and Overvoltage protection
- Suitable for LED lighting and moving sign applications
- No minimum load requirement
- Built-in active PFC function
- Cooling by free air convection


Specifications:

- Universal Input: 90-264VAC
- AC Input Frequency: 47-63Hz



For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Mean Well Part No.	Fig.	Output Voltage	Output Current	Power	Dimensions: mm			Price Each		
						L	W	H	1	10	20
709-PLP30-12	PLP-30-12	A	12V	2.5A	30W	101.6	50.8	23			
709-PLP30-24	PLP-30-24	A	24V	1.3A	31.2W	101.6	50.8	23			
709-PLP30-48	PLP-30-48	A	48V	.63A	30.24W	101.6	50.8	23			
709-PLP45-12	PLP-45-12	A	12V	3.8A	45.6W	101.6	50.8	28			
709-PLP45-24	PLP-45-24	A	24V	1.9A	45.6W	101.6	50.8	28			
709-PLP45-48	PLP-45-48	A	48V	0.95A	45.6W	101.6	50.8	28			
709-PLP60-12	PLP-60-12	A	12V	5A	60W	101.6	50.8	28			
709-PLP60-24	PLP-60-24	A	24V	2.5A	60W	101.6	50.8	28			
709-PLP60-48	PLP-60-48	A	48V	1.3A	62.5W	101.6	50.8	28			

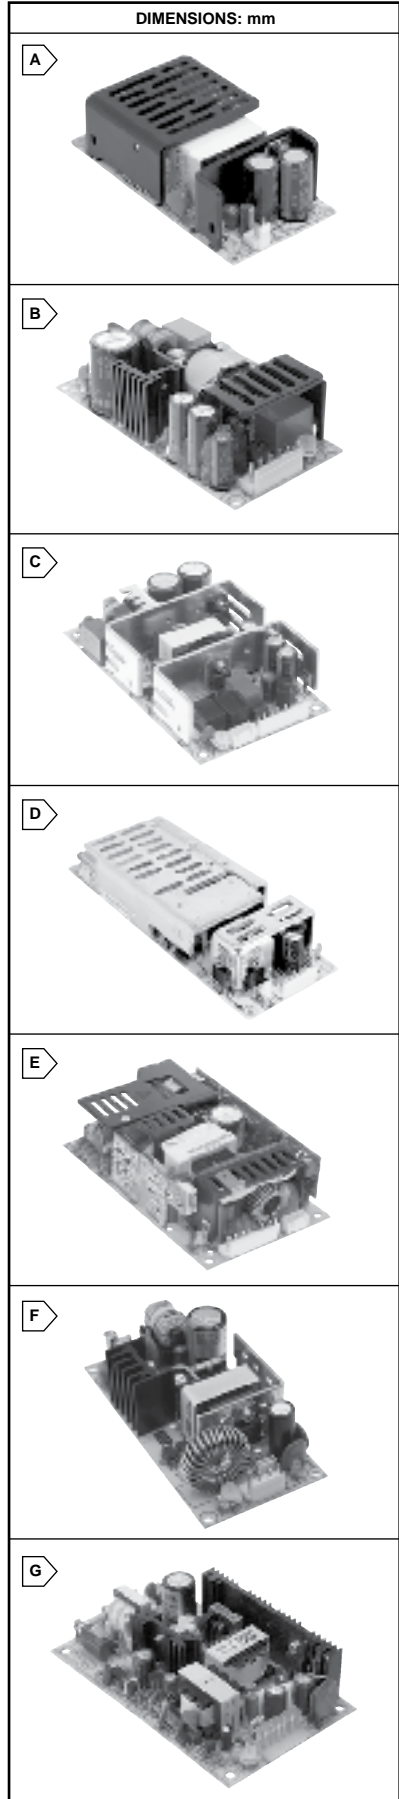

MEAN WELL 60-100W DUAL OUTPUT WITH BATTERY CHARGER (UPS FUNCTION) POWER SUPPLY

Features:

- Short circuit, Overload, and Overvoltage protection
- Battery low protections / Battery polarity protection by fuse
- Cooling by free air convection

Specifications:

- Universal Input: 90-264VAC
- AC Input Frequency: 47-63Hz



For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Mean Well Part No.	Fig.	Output Voltage	Output Current	Power	Dimensions: mm			Price Each		
						L	W	H	1	10	20
709-PSC60A	PSC-60A	B	13.8V	2.8A	59.34W	101.6	50.8	29			
709-PSC60B	PSC-60B	B	13.8V 27.6V	1.5A 1.4A	59.34W	101.6	50.8	29			
709-PSC100A	PSC-100A	C	13.8V	4.75A	100W	127	76.2	31			
709-PSC100B	PSC-100B	C	13.8V 27.6V	2.5A 1.25A	100.74W	127	76.2	31			

MEAN WELL 150W SINGLE OUTPUT POWER SUPPLY WITH PFC FUNCTION

Features:

- Short circuit, Overload, Overvoltage, and Overtemperature protection
- Built-in active PFC function, PF>0.95
- Cooling by free air convection
- No load power consumption <1W@240VAC
- ZCS/ZVS technology to reduce power dissipation

Specifications:

- Universal Input: 90-264VAC
- AC Input Frequency: 47-63Hz



For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Mean Well Part No.	Fig.	Output Voltage	Output Current	Power	Dimensions: mm			Price Each		
						L	W	H	1	10	20
709-ASP150-15	ASP-150-15	D	15V	9.5A	142.5W	169	60.7	28.5			
709-ASP150-20	ASP-150-20	D	20V	7.5A	150W	169	60.7	28.5			

MEAN WELL 160W SINGLE OUTPUT MEDICAL POWER SUPPLY

Features:

- Short circuit, Overload, Overvoltage, and Overtemperature protection
- Built-in active PFC function
- With power good and fail signal output
- Free air convection for 110W and 160W with 20.5CFM forced air

Specifications:

- Universal Input: 90-264VAC
- AC Input Frequency: 47-63Hz



For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Mean Well Part No.	Fig.	Output Voltage	Output Current	Power	Dimensions: mm			Price Each		
						L	W	H	1	10	20
709-RPS160-12	RPS-160-12	E	12V	12.9A	159.8W	127	76.2	34.6			
709-RPS160-24	RPS-160-24	E	24V	6.5A	161W	127	76.2	34.6			

MEAN WELL 30-45W DC-DC SINGLE OUTPUT SWITCHING POWER SUPPLY

Features:

- 2:1 wide input range
- Short circuit, Overload, Overvoltage, Polarity protection
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test



For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Mean Well Part No.	Fig.	Input Range	Output Voltage	Output Current	Power	Dimensions: mm			Price Each		
							L	W	H	1	10	20
709-PSD30A-5	PSD-30A-5	F	9-18VDC	5V	5A	25W	101.6	50.8	30			
709-PSD30B-5	PSD-30B-5	F	18-36VDC	5V	5A	25W	101.6	50.8	30			
709-PSD30C-5	PSD-30C-5	F	36-72VDC	5V	5A	25W	101.6	50.8	30			
709-PSD30A-12	PSD-30A-12	F	9-18VDC	12V	2.5A	30W	101.6	50.8	30			
709-PSD30B-12	PSD-30B-12	F	18-36VDC	12V	2.5A	30W	101.6	50.8	30			
709-PSD30C-12	PSD-30C-12	F	36-72VDC	12V	2.5A	30W	101.6	50.8	30			
709-PSD30A-24	PSD-30A-24	F	9-18VDC	24V	1.25A	30W	101.6	50.8	30			
709-PSD30B-24	PSD-30B-24	F	18-36VDC	24V	1.25A	30W	101.6	50.8	30			
709-PSD30C-24	PSD-30C-24	F	36-72VDC	24V	1.25A	30W	101.6	50.8	30			
709-PSD45A-05	PSD-45A-05	G	9.2-18VDC	5V	6A	30W	127	76	30			
709-PSD45B-05	PSD-45B-05	G	18-36VDC	5V	9A	45W	127	76	30			
709-PSD45C-05	PSD-45C-05	G	37-72VDC	5V	9A	45W	127	76	30			
709-PSD45A-12	PSD-45A-12	G	9.2-18VDC	12V	2.5A	30W	127	76	30			
709-PSD45B-12	PSD-45B-12	G	18-36VDC	12V	3.75A	45W	127	76	30			
709-PSD45C-12	PSD-45C-12	G	37-72VDC	12V	3.75A	45W	127	76	30			
709-PSD45A-24	PSD-45A-24	G	9.2-18VDC	24V	1.25A	30W	127	76	30			
709-PSD45B-24	PSD-45B-24	G	18-36VDC	24V	1.875A	45W	127	76	30			
709-PSD45C-24	PSD-45C-24	G	37-72VDC	24V	1.875A	45W	127	76	30			