

RabbitCore[®]

RCM4200 Series

Communications and Control Processor

Device intelligence and Fast Ethernet connectivity for data logging and serial to Ethernet applications.



Overview

The RCM4200 series of core modules are pin-compatible and easily interchangeable with other RCM4XXX based products. The RCM4200 acts as the microprocessor of an embedded system and is designed to mount directly to a user-supplied motherboard, allowing CMOS-compatible digital devices to interface with the motherboard. The RCM4200 offers robust features including large memory and Fast Ethernet, making it ideal for intensive communications and data-logging applications. The optional analog helps to diversify your connectivity options.

Evaluation of the RCM4200 is easy with the RabbitCore RCM4200 development kit, which provides all the necessary hardware and software to quickly get started.


Development Kit

This low-cost development kit includes everything you need to get started



\$269

Application Highlight

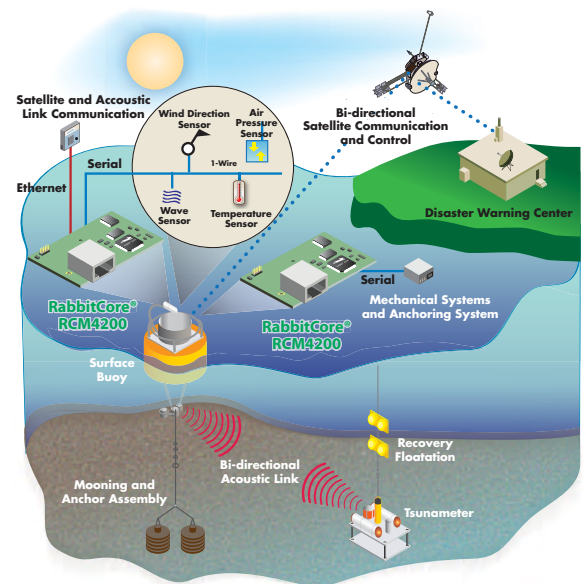

Features/Benefits

- Rabbit 4000 running at 59 MHz
- 10/100Base-T Ethernet, RJ-45 jack
- 512K Flash / 512K Data SRAM
- 4 MB or 8 MB Serial Flash for data storage
- Up to 35 GPIO, up to 5 serial ports
- 8 channels 12-bit A/D converter option
- Embedded device networking, intelligence, I/O control and web server capability
- Ability to remotely update firmware



Features		
Microprocessor	Rabbit® 4000 at 59 MHz	Rabbit® 4000 at 29 MHz
EMI Reduction	Spectrum spreader for reduced EMI (radiated emissions)	
Ethernet Port	10/100Base-T, RJ-45, 3 LEDs	
Data SRAM	512K (8-bit)	
Program Execution Fast SRAM	512K (8-bit)	N/A
Flash Memory	512K (8-bit)	
Serial Flash Memory	8 MB	4 MB
Backup Battery	Connection for user-supplied backup battery (to support RTC and data SRAM)	
General-Purpose I/O	25 parallel digital I/O lines: • Configurable with 4 layers of alternate functions	35 parallel digital I/O lines: • Configurable with 4 layers of alternate functions
Additional Inputs	2 startup mode, reset in, CONVERT	2 startup mode, reset in
Additional Outputs	Status, reset out, analog VREF	Status, reset out
Analog Inputs	8 channels single-ended or 4 channels differential Programmable gain 1, 2, 4, 5, 8, 10, 16, and 20 V/V	N/A
A/D Converter Resolution	12 bits (11 bits single-ended)	N/A
A/D Conversion Time (including 120 µs raw)	180 µs	N/A
Auxiliary I/O Bus	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write	
Serial Ports	4 shared high-speed, CMOS-compatible ports: • All 4 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI) • 1 asynchronous clocked serial port shared with programming port • 1 clocked serial port shared with serial flash • 1 clocked serial port shared with A/D converter	5 shared high-speed, CMOS-compatible ports: • All 5 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 1 as SDLC/HDLC • 1 clocked serial port shared with serial flash • 1 asynchronous clocked serial port dedicated for programming
Serial Rate	Maximum asynchronous baud rate = CLK/8	
Slave Interface	Slave port allows the RCM4200 to be used as an intelligent peripheral device slaved to a master processor	
Real Time Clock	Yes	
Timers	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers	
Watchdog/Supervisor	Yes	
Pulse-Width Modulators	• 3 channels synchronized PWM with 10-bit counter • 3 channels variable-phase or syn-chronized PWM with 16-bit counter	• 4 channels synchronized PWM with 10-bit counter • 4 channels variable-phase or syn-chronized PWM with 16-bit counter
Input Capture	2 input capture channels can be used to time input signals from various port pins	
Quadrature Decoder	1 quadrature decoder channel accepts inputs from external incremental encoder modules	2 quadrature decoder channel accepts inputs from external incremental encoder modules
Power (pins unloaded)	3.0–3.6VDC, 240 mA (typ.) @ 3.3V, 275 mA @ 3.6V and 85°C (max.)	3.0–3.6VDC, 200 (typ.) mA @ 3.3V, 225 mA @ 3.6V and 85°C (max.)
Operating Temperature	-40° C to +85° C	
Humidity	5% to 95%, non-condensing	
Connectors	One 2 × 25, 1.27 mm pitch IDC signal header, One 2 × 5, 1.27 mm pitch IDC programming header	
Board Size	1.84" × 2.42" × 0.84" (47 mm × 61 mm × 21 mm)	
Price (qty. 1); Part Number	\$109; 20-101-1131	\$99; 20-101-1132
Development Kit; Part Number	\$269; 101-1155	

Visit www.digiembedded.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a one-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
KK**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
(HK) Limited**
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digiembedded.com



91001548
82/411

© 2009-2011 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, the Wireless M2M logo, and RabbitCore are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

