

## Features

- Ideal for WDCT Applications
- Saturated Output Power: +25 dBm Typical
- Power Gain: 25 dB Typical
- Low Current: 400 mA at  $P_{SAT}$
- Micro-Amp Shutdown
- Operates from 1.5 V to 4.0 V
- $V_{EN}$  configurable for either 1.7 V or 2.5 V
- Lead-Free 3 mm 12-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

## Description

The MAAPSS0066 is a three stage power amplifier designed for Cordless Telephone applications. This power amplifier is packaged in a standard outline, lead-free 3 mm 12-lead PQFN plastic package. The MAAPSS0066 features an integrated bias controller that allows for micro amp shut down current.

## Ordering Information<sup>1</sup>

Part Number	Package
MAAPSS0066	Bulk Packaging
MAAPSS0066TR-3000	3000 piece reel
MAAPSS0066SMB	Sample Test Board (Includes 5 Samples)

1. Reference Application Note M513 for reel size information.


## Absolute Maximum Ratings<sup>2,3</sup>

Parameter	Absolute Maximum
Input Power	+ 5 dBm
Operating Supply Voltage	+4.0 Volts
Operating Control Voltage	+3.0 Volts
Operating Temperature	-20°C to +85°C
Channel Temperature	+150°C
Storage Temperature	-40°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

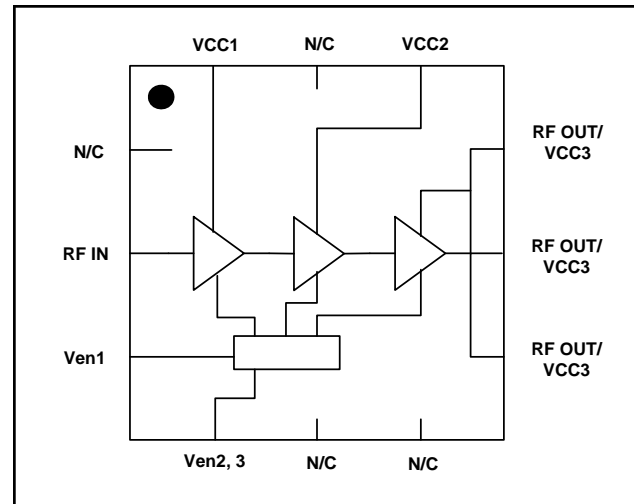

## Pin Configuration

Pin No.	Pin Name	Description
1	N/C	No Connection
2	RF <sub>IN</sub>	RF Input
3	V <sub>EN1</sub>	Power Enable
4	V <sub>EN2,3</sub>	Power Enable
5	N/C	No Connection
6	N/C	No Connection
7	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
8	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
9	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
10	V <sub>CC2</sub>	2nd Stage Supply
11	N/C	No Connection
12	V <sub>CC1</sub>	1st Stage Supply
Pad <sup>4</sup>	GND	RF & DC Ground

4. The exposed pad centered on the package bottom must be connected to RF and DC ground.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

### Electrical Specifications:

Frequency = 2450 MHz,  $P_{IN} = -1$  to 3 dBm,  $V_{CC} = 2.4$  V,  $V_{EN} = 2.5$  V,  $T_A = 25$  °C,  $Z_0 = 50\Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max
Small Signal Gain	$P_{in} = -20$ dBm	dB	—	27	—
Input Return Loss	—	dB	—	15	—
Output Power	—	dBm	23	25	—
Power Flatness	$2.0$ V < $V_{CC}$ < $3.0$ V	dB	—	3	—
PAE	—	%	—	33	—
Current	—	mA	—	400	500
Current, Off	$V_{EN} = 0$ V	$\mu$ A	—	3	10
Pdiss	$P_{OUT} = 25.0$ dBm	W	—	0.6	—
Control Pins	$V_{EN, Low}$ $V_{EN, High}$ Current	V V mA	0 2.0 —	— — 3	0.5 2.5 4.0
Harmonics	2f 3f	dBc dBc	— —	-54 -42	— —
Forward Isolation	$V_{EN} = 0$ V	dB	—	39	—
Duty Cycle	—	%	—	—	100
Stability	$+1.5$ V < $V_{CC}$ < $+3.5$ V, $P_{IN} = -1$ to 3 dBm, VSWR < 6:1 $-20$ °C < $T_C$ < $+70$ °C, RBW = 3 MHz max hold			All spurs < -60 dBc	

### Lead-Free 3 mm 12-Lead PQFN†

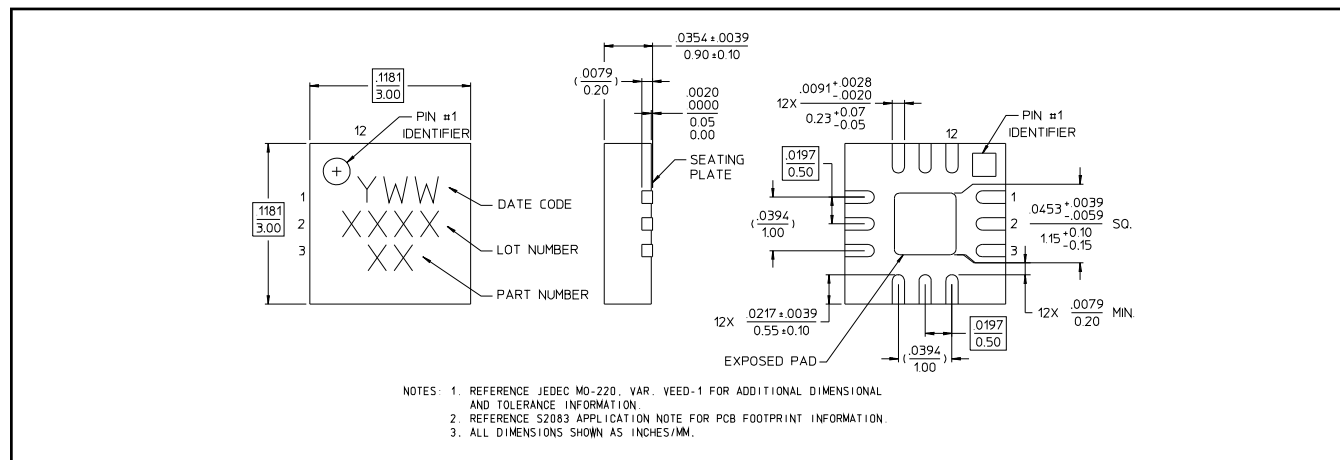


† Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.

### Operating the MAAPSS0066

The MAAPSS0066 can be damaged by electrostatic discharge (ESD). Use proper ESD control techniques when handling this device. To operate the MAAPSS0066, turn on  $V_{CC}$  before  $V_{EN}$  for power on and turn off  $V_{CC}$  after  $V_{EN}$  for shutdown.

## Evaluation Board Schematic

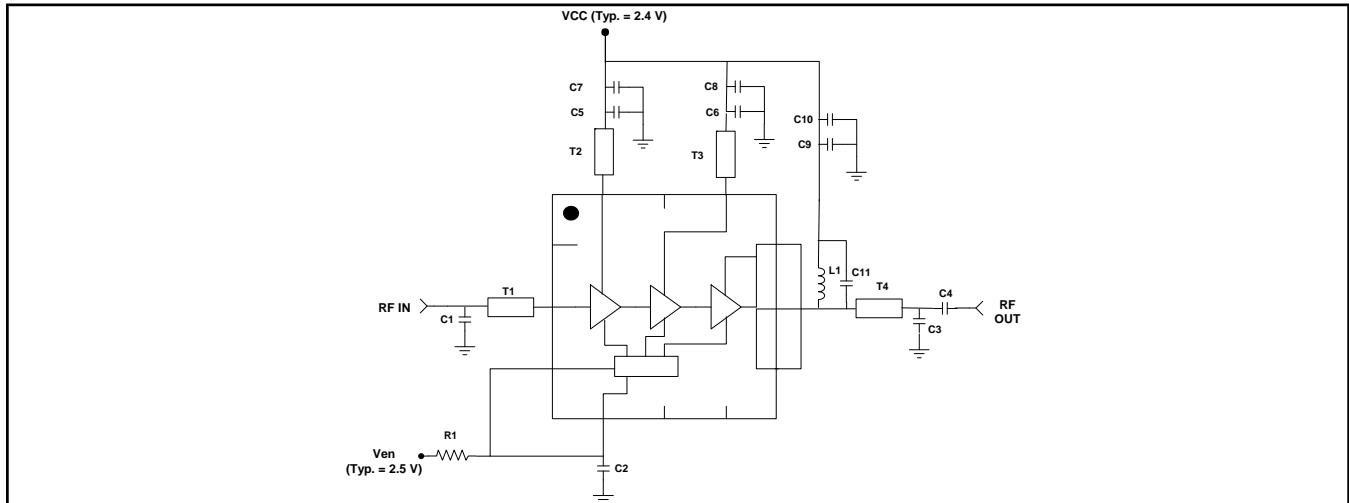


## MAAPSS0066 External Parts List

Designator	Value	Footprint	Manufacturer	Part ID
C1, C3	2 pF	0402	Murata	GRM1555C1H2R0CZ01
C2	1 nF	0402	Murata	GRM1555R71H102KA01
C4, C5, C6	47 pF	0402	Murata	GRM1555C1H470JZ01
C7, C8, C9	1 $\mu$ F	0402	Murata	GRM1555R60J105KE19
C10	4700 pF	0402	Murata	GRM155R71H472KA01D
C11	1 pF	0402	Murata	GRM36C0G010C50
L1	10 nH	0402	Coilcraft	0402CS-10NXJB
R1 ( $V_{EN} = 2.5 V$ )	240 Ohm	0402	KOA	RK73B1ET241J
R1 ( $V_{EN} = 1.7 V$ )	100 Ohm	0402	KOA	RK73B1ET101J

## Transmission Line Dimensions, 0.20 mm thick FR4


Designator	Length (mm) *	Width (mm)
T1	5.20	0.37
T2	1.00	0.37
T3	1.27	0.37
T4	3.20	0.37

\* From package edge to center of component

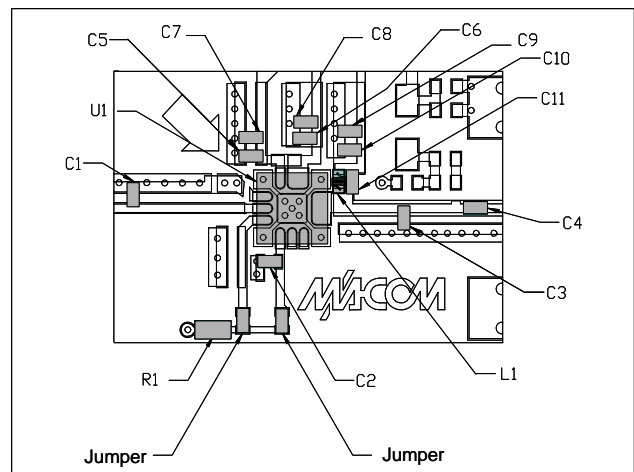


**Typical Characteristics (All data uses the supplied sample board BOM)**


**$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $P_{IN}$  @ 2.4 V, 2450 MHz**

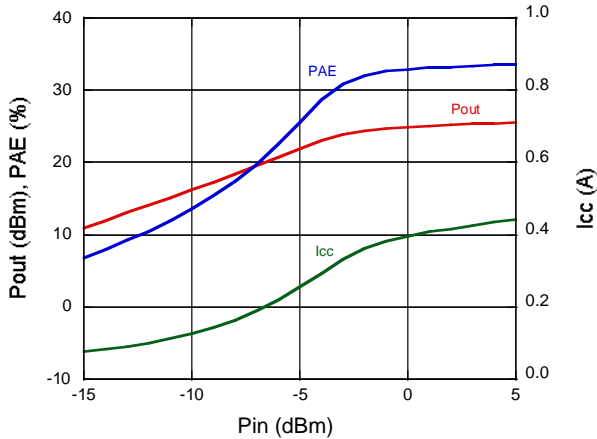


**$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $V_{CC}$  @ 2450 MHz,  $P_{IN} = 1$  dBm**

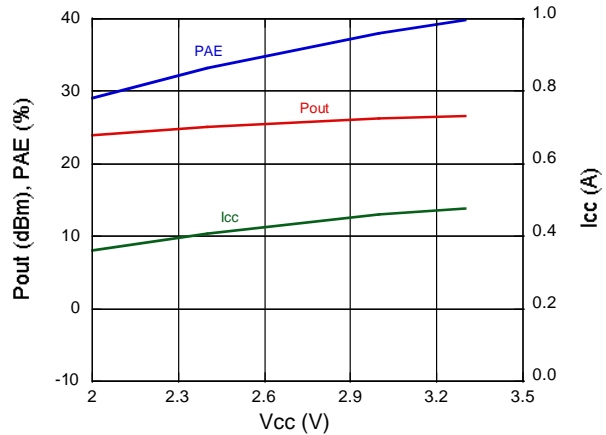


**$P_{OUT}$  vs.  $P_{IN}$  and Temp @ 2.4 V, 2450 MHz**

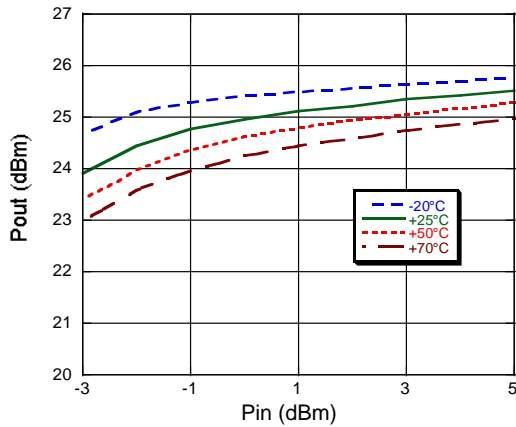


**$I_{CC}$  vs.  $P_{OUT}$  and Temp @ 2.4 V, 2450 MHz**

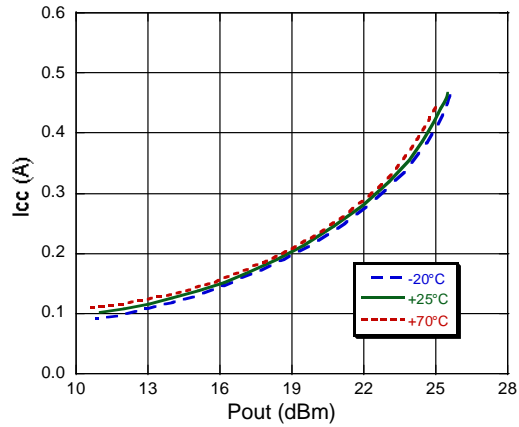

**$P_{OUT}$  vs.  $V_{CC}$  @ 2450 MHz,  $P_{IN} = 1$  dBm**

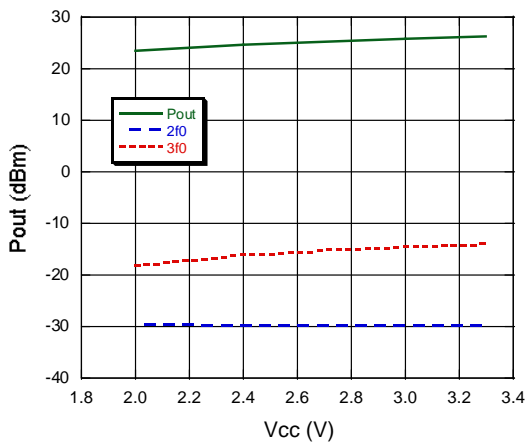

**$P_{OUT}$  vs.  $P_{IN}$ ,  $V_{CC} = 2.4$  V @ 2450 MHz**

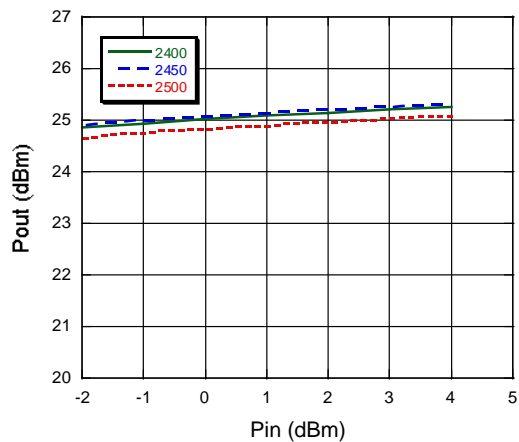

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

**Typical Characteristics (All data uses the supplied sample board BOM)**

**S21 vs. Frequency @  $V_{CC} = 2.4\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$**

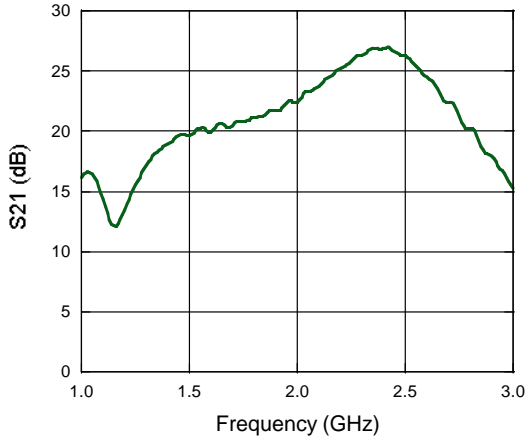


**S22, S11 vs. Frequency @  $V_{CC} = 2.4\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$**

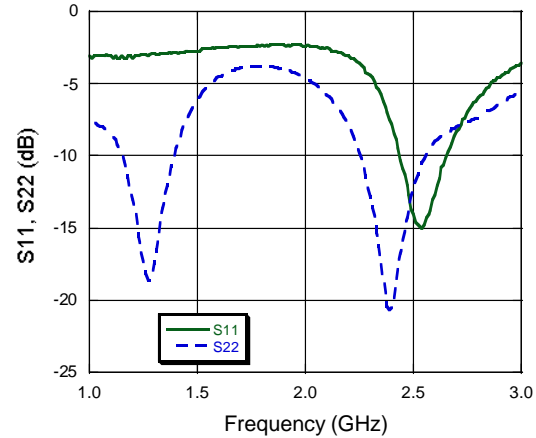


**Typical Characteristics,  $V_{EN} = 1.7\text{ V}$  (All data uses the supplied sample board BOM)**


**$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $P_{IN}$  @  $2.4\text{ V}$ ,  $2450\text{ MHz}$**

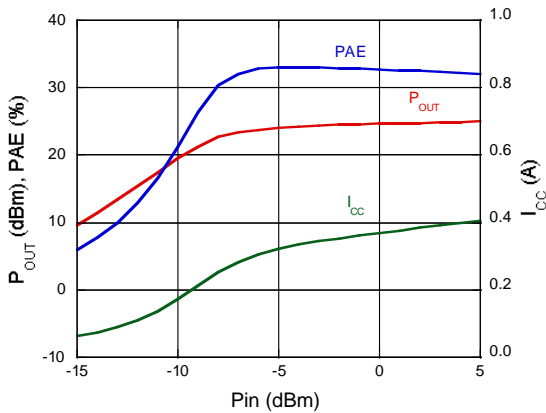


**$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $V_{CC}$  @  $2450\text{ MHz}$ ,  $P_{IN} = 0\text{ dBm}$**

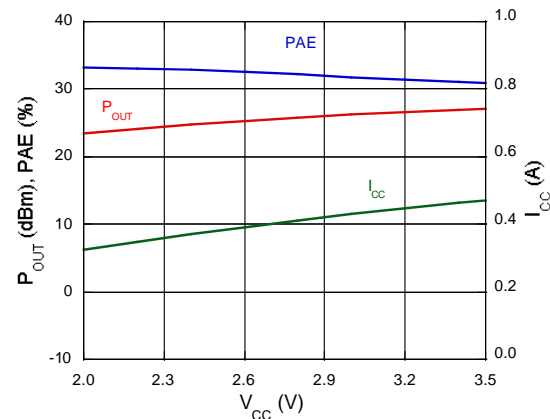

**$P_{OUT}$ , PAE,  $I_{CC}$  vs. Freq. @  $2450\text{ MHz}$ ,  $P_{IN} = 0\text{ dBm}$**

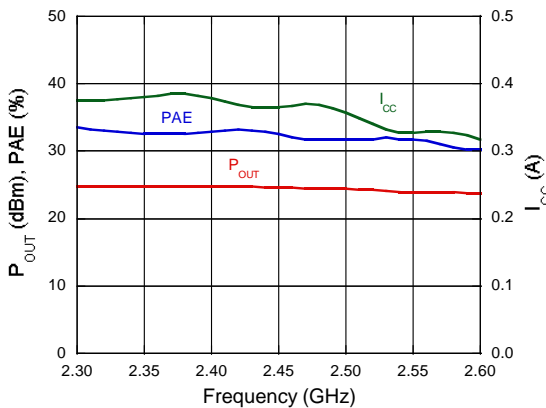

**$P_{OUT}$  vs.  $V_{EN}$  @  $2.4\text{ V}$ ,  $2450\text{ MHz}$ ,  $P_{IN} = 0\text{ dBm}$**

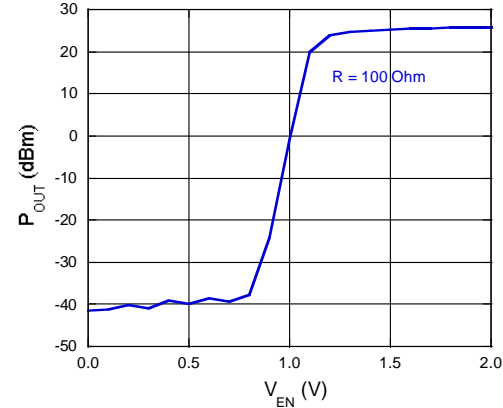

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.