


Product Dimensions



Description

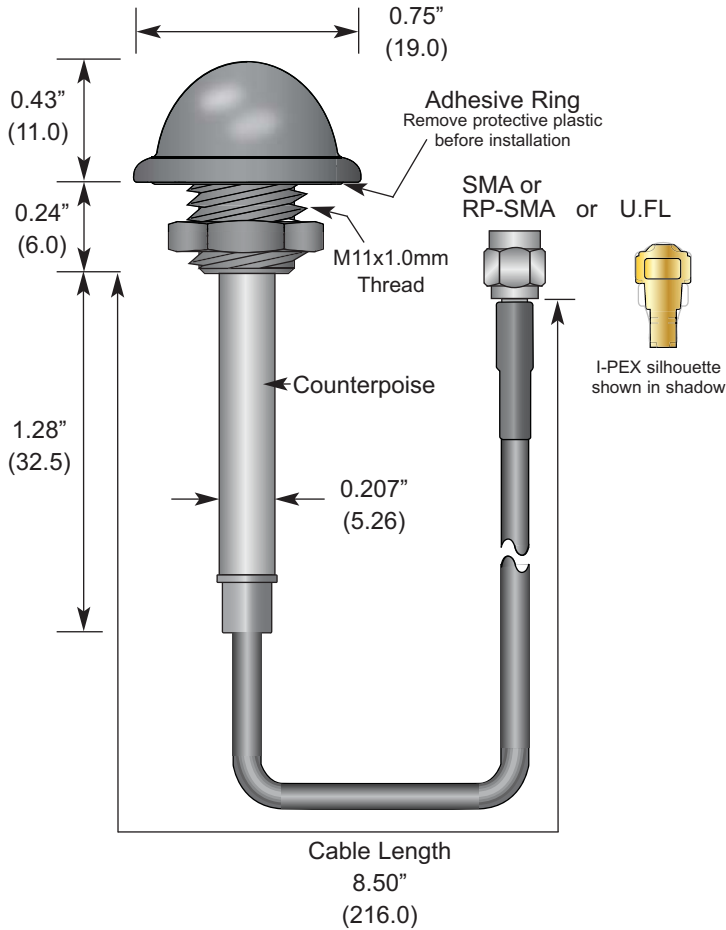

The WRT Series antenna is ideally suited for applications such as wireless vending, security, traffic, or power equipment which require an unobtrusive, tamper-resistant antenna solution. The tiny 19 x 11mm radome installs through a small hole on the product and is anchored by a threaded base. An adhesive foam compression ring is used to resist the elements. The 1/2-wave antenna also features an integral counterpoise, which eliminates the need for a proximity ground plane. The antenna's coax feed is available with SMA, RP-SMA, or a U.FL / MHF compatible connector. U.FL and I-PEX MHF connector standards are compatible with each other. Alternate coax lengths, connectors and custom colors are available for volume OEM customers.

Features

- Low cost
- Unobtrusive
- Tamper resistant
- Integral counterpoise
- Indoor / outdoor
- Adhesive or permanent mount

Electrical Specifications


- | | |
|---------------------------|------------------------------------|
| • Center Freq. | 2.45GHz |
| • Recommended Oper. Freq. | 2.4 - 2.5GHz |
| • Wavelength | 1/2-wave |
| • VSWR | <1.9 typ. at center |
| • Impedance | 50 ohms |
| • Connector | RP-SMA, SMA, or U.FL/MHF |
| • Cable | RG-174 RP-SMA & SMA
1.32mm U.FL |

Electrical specifications and plots measured on 24" x 24" reference ground plane

Ordering Information

- ANT-2.4-WRT-RPS (with RP-SMA connector)
- ANT-2.4-WRT-SMA (with SMA connector)
- ANT-2.4-WRT-UFL (with U.FL/MHF compatible connector)

VSWR Graph

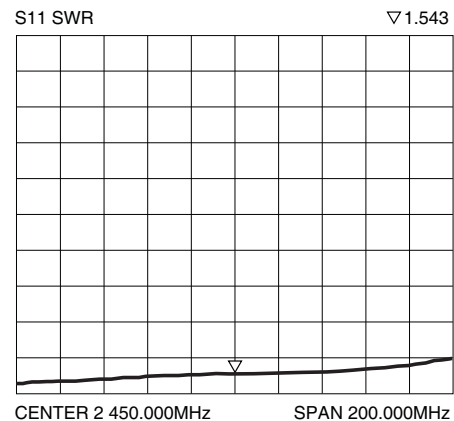

Typical VSWR