



■ Features :

- Wide input range 180~480VAC
- · Built-in active PFC function
- High efficiency up to 91%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- · Class 2 power unit
- Three in one dimming function (0~10Vdc or 10V PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.8)







HVG-100-15 A

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 0~10Vdc or 10V PWM signal or resistance.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HVG-100-15	HVG-100-20	HVG-100-24	HVG-100-30	HVG-100-36	HVG-100-42	HVG-100-48	HVG-100-54				
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V				
	RATED CURRENT	5A	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A				
	RATED POWER	75W	96W	96W	96W	95.4W	95.76W	96W	95.58W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p				
	VOLTAGE ADJ. RANGE Note.5	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V				
ОИТРИТ	CURRENT ADJ. RANGE	Can be adjusted by internal potentiometer or through output cable											
JUIPUI		2.75 ~ 5A	2.64 ~ 4.8A	2.2 ~ 4A	1.76 ~ 3.2A	1.45 ~ 2.65A	1.25 ~ 2.28A	1.1 ~ 2A	0.97 ~ 1.77A				
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME	2500ms, 80ms	2500ms, 80ms at full load 440VAC / 347VAC ; B type 3000ms, 280ms at 95% load 440VAC / 347VAC										
	HOLD UP TIME (Typ.)	30ms at full load 440VAC / 347VAC											
	VOLTAGE RANGE Note.4	180 ~ 480VAC 254VDC ~ 679VDC											
	FREQUENCY RANGE	47 ~ 63Hz											
		$PF \ge 0.98/230VAC$, $PF \ge 0.98/277VAC$, $PF \ge 0.97/347VAC$, $PF \ge 0.94/440VAC$ ($PF \ge 0.93/440VAC$ only for 15V model)											
	POWER FACTOR (Typ.)	at full load (Please refer to "Power Factor Characteristic" curve)											
INPUT	EFFICIENCY (Typ.)	89%	90%	91%	91%	90.5%	90.5%	91%	91%				
	AC CURRENT (Typ.)	0.32A / 347VAC											
	INRUSH CURRENT (Typ.)	COLD START 50A / 440VAC											
	LEAKAGE CURRENT	<0.75mA / 440VAC											
PROTECTION		95 ~ 108%											
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
	SHOKI CIKCUII	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V				
INOTEOTION	OVER VOLTAGE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
		100°C ±10°C (RTH2)											
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.												
	WORKING TEMP. WORKING HUMIDITY	-40 ~ +70°C (Refer to "Derating Curve") 20 ~ 95% RH non-condensing											
ENVIDONMENT													
ENVIRONMENT	STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT	-40 ~ +80°C, 10 ~ 95% RH											
		±0.03%/°C (0 ~			l V)	V 7							
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
	SAFETY STANDARDS Note.6			· ·		5 or IP67 approv	ea						
SAFETY &	WITHSTAND VOLTAGE			.88KVAC O/P									
EMC	ISOLATION RESISTANCE		·	1 Ohms / 500VD									
	EMC EMISSION		-			•	or 15V model) ; E	N61000-3-3, FC	C part 15 class				
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level (surge 4KV), criteria A											
	MTBF	174.9Khrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION	236*68*38.8mm (L*W*H)											
	PACKING	0	15.2Kg/0.74CUF										
NOTE	Ripple & noise are measure Tolerance : includes set up Derating may be needed ur Type A only. Safety and EMC design ref. The power supply is consid	wentioned are measured at 347VAC input, rated load and 25°C of ambient temperature. d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. plerance, line regulation and load regulation. der low input voltages. Please check the static characteristics for more details. r to EN60598-1, CNS15233, GB7000.1. red as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the all equipment manufacturers must re-qualify EMC Directive on the complete installation again.											

※ IP67 rated. Timer dimming function, contact MEAN WELL for details.




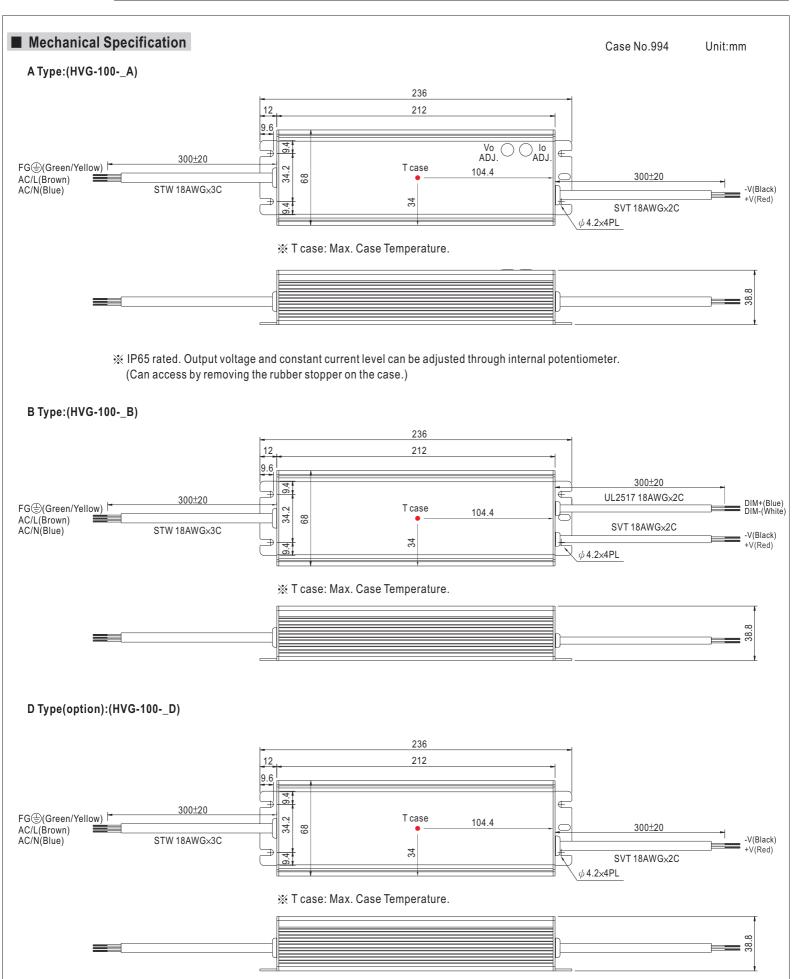



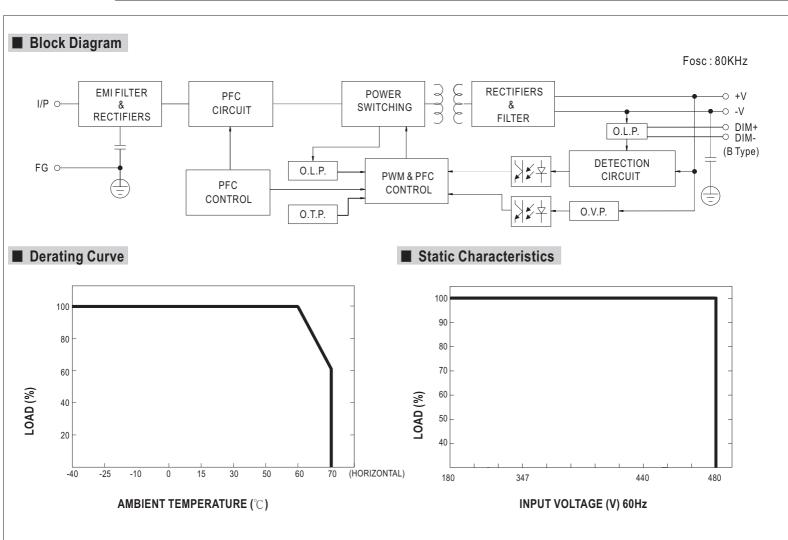


■ Power Factor Characteristic

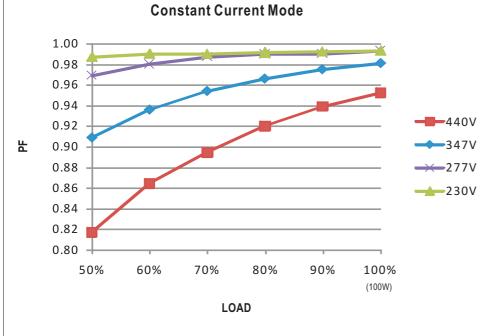



■ EFFICIENCY vs LOAD (48V Model)

HVG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

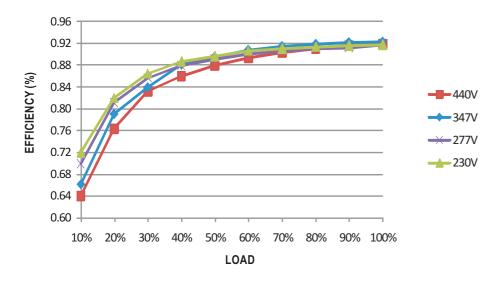


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.


Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve



■ DIMMING OPERATION



- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K Ω	OPEN
value	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20K Ω /N	30KΩ/N	40K Ω /N	50K Ω /N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

※ 0 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%


💥 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

■ WATERPROOF CONNECTION


Waterproof connector

Waterproof connector can be assembled on the output cable of HVG-100 to operate in dry/wet/damp or outdoor environment.

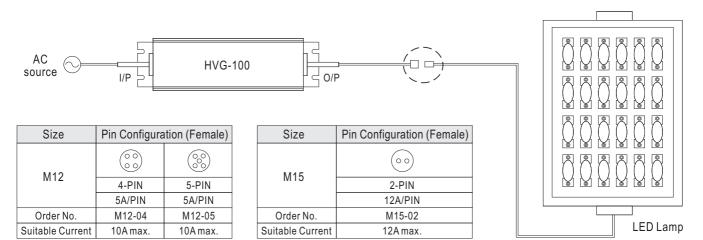





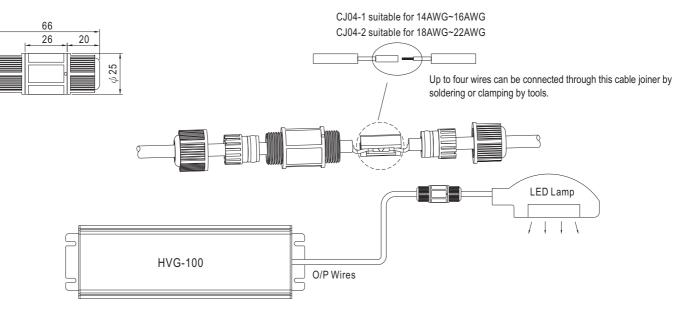

O Junction Box(Option)

