


IR Receiver Modules for 3D Synchronization Signals



16797


MECHANICAL DATA

Pinning:

 $1 = GND, 2 = N.C., 3 = V_S, 4 = OUT$

FEATURES

 Center frequency at 25 kHz to reduce interference with IR remote control signals at 30 kHz to 56 kHz





COMPLIANT


- Very low supply current and stand-by mode
- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- Supply voltage range: 2.5 V to 5.5 V
- · Improved immunity against modulated light sources
- Insensitive to supply voltage ripple and noise
- Taping available for topview and sideview assembly
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

DESCRIPTION


The TSOP35D25 is an SMD IR receiver module for 3D synchronization signals. The receiver is designed to operate at a carrier frequency of 25 kHz and a wavelength of 830 nm to avoid interference with standard remote control systems at 940 nm and 30 kHz to 56 kHz. The TSOP35D25 can receive continuously transmitted signal patterns with a minimum burst length of 6 cycles and frame rates up to 200 Hz. The circuit provides good suppression of optical noise from CFLs, LCD backlight and plasma panels.

PARTS TABLE	
CARRIER FREQUENCY	GOOD NOISE SUPPRESSION AND FAST BURST RATE
25 kHz	TSOP35D25

BLOCK DIAGRAM



APPLICATION CIRCUIT



 $\rm R_1$ and $\rm C_1$ are recommended for protection against EOS. Components should be in the range of 33 Ω < $\rm R_1$ < 1 kΩ, $\rm C_1$ > 0.1 $\rm \mu F.$

IR Receiver Modules for 3D Synchronization Signals



ABSOLUTE MAXIMUM RATINGS				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Supply voltage (pin 3)		V _S	- 0.3 to + 6	V
Supply current (pin 3)		I _S	3	mA
Output voltage (pin 4)		V _O	- 0.3 to (V _S + 0.3)	V
Output current (pin 4)		I ₀	5	mA
Junction temperature		T _j	100	°C
Storage temperature range		T _{stg}	- 40 to + 100	°C
Operating temperature range		T _{amb}	- 30 to + 85	°C
Power consumption	T _{amb} ≤ 85 °C	P _{tot}	10	mW

Note

• Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability.

ELECTRICAL AND OPTICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply current (pin 3)	$E_V = 0, V_S = 3.3 V$	I _{SD}	0.27	0.35	0.45	mA
	E _v = 40 klx, sunlight	I _{SH}		0.45		mA
Supply voltage		Vs	2.5		5.5	V
Transmission distance	$E_{V}=0$, test signal see fig. 1, IR diode TSHG8400, $I_{F}=250\ \text{mA}$	d		35		m
Output voltage low (pin 4)	$I_{OSL} = 0.5 \text{ mA}, E_e = 0.7 \text{ mW/m}^2,$ test signal see fig. 1	V _{OSL}			100	mV
Minimum irradiance	Pulse width tolerance: t_{pi} - 80 μ s < t_{po} < t_{pi} + 160 μ s, test signal see fig. 1	E _{e min.}		0.15	0.35	mW/m²
Maximum irradiance	t_{pi} - 80 $\mu s < t_{po} < t_{pi}$ + 160 μs , test signal see fig. 1	E _{e max.}	30			W/m ²
Directivity	Angle of half transmission distance	Ψ1/2		± 50		deg

TYPICAL CHARACTERISTICS ($T_{amb} = 25$ °C, unless otherwise specified)




Fig. 1 - Output Active Low




Fig. 2 - Pulse Length and Sensitivity in Dark Ambient



 V_{OL}

IR Receiver Modules for 3D Synchronization Signals

Vishay Semiconductors




Fig. 3 - Output Function

toff




Fig. 4 - Output Pulse Diagram




Fig. 5 - Frequency Dependence of Responsivity




Fig. 6 - Sensitivity in Bright Ambient




Fig. 7 - Sensitivity vs. Supply Voltage Disturbances




Fig. 8 - Sensitivity vs. Electric Field Disturbances

IR Receiver Modules for 3D Synchronization Signals







Fig. 9 - Maximum Envelope Duty Cycle vs. Burst Length






Fig. 10 - Sensitivity vs. Ambient Temperature




Fig. 13 - Sensitivity vs. Supply Voltage




Fig. 11 - Relative Spectral Sensitivity vs. Wavelength



Vishay Semiconductors

SUITABLE DATA FORMAT

The TSOP35D25 is designed to suppress spurious output pulses due to noise or disturbance signals. Data and disturbance signals can be distinguished by the devices according to carrier frequency, burst length and envelope duty cycle. The data signal should be close to the band-pass center frequency (e.g. 25 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the TSOP35D25 in the presence of a disturbance signal, the sensitivity of the receiver is reduced to insure that no spurious pulses are present at the output. Some examples of disturbance signals which are suppressed are

- DC light (e.g. from tungsten bulb or sunlight)
- · Continuous signals at any frequency
- Strongly or weakly modulated noise from fluorescent lamps with electronic ballasts (see figure 14 or figure 15)




Fig. 14 - IR Signal from Fluorescent Lamp with Low Modulation




Fig. 15 - IR Signal from Fluorescent Lamp with High Modulation

	TSOP35D25
Minimum burst length	6 cycles/burst
After each burst of length a minimum gap time is required of	6 to 24 cycles ≥ 6 cycles
For bursts greater than a minimum gap time in the data stream is needed of	24 cycles > 4 x burst length
Maximum rate of short bursts (constant irradiance)	2000 bursts/s
Maximum rate of short bursts (variable irradiance)	220 bursts/s

IR Receiver Modules for 3D Synchronization Signals



STAND-BY MODE OF THE TSOP35D25

If an application requires an ultra low average supply current in order to save battery life, the TSOP35D25 can be operated with an intermittent supply voltage. A typical application circuit shown in fig. 16.

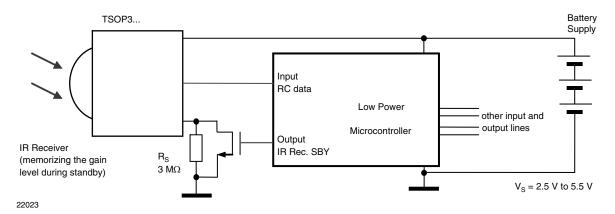


Fig. 16 - Application Circuit for the TSOP3...with Intermittent Supply Voltage

To receive a continuous data signal while using the TSOP3... with an intermittent supply voltage, the receiver must be activated in advance of the expected data frame as shown in figure 17.

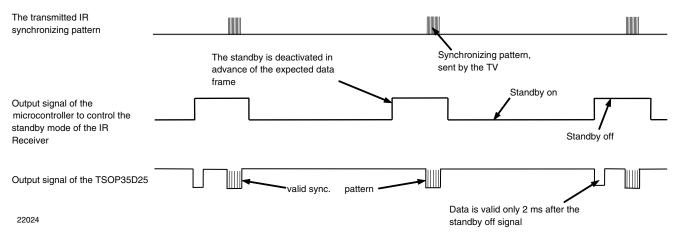


Fig. 17 - Signal Timing in Power Saving Mode with Continuous Receiving Function

In normal operation without using the stand-by feature, the gain level of the TSOP35D25 returns to a default level after the device is disconnected from supply voltage and reconnected again. A settling time of up to 100 ms is necessary until the gain has settled to an optimum level that is well matched to the ambient noise level.

Using the device in stand-by mode, the TSOP35D25 memorizes its gain setting while in standby. On re-activation, the gain immediately returns to the correct level present before stand-by. This operation insures that there are no spurious pulses on power-up due to mismatch between the gain level and the ambient light conditions.

www.vishay.com



Vishay Semiconductors

ELECTRICAL AND OPTICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Serial resistor to activate the standby mode	V _S = 3 V	R _S	1.2	1.5	2	ΜΩ
	V _S = 5 V	R _S	2	3	4	IVISZ
Standby supply current	$V_{S} = 3 \text{ V}, R_{S} = 1.5 \text{ M}\Omega$	I _{SBY}	1	1.4	2	μΑ
	$V_S = 5 \text{ V}, R_S = 3 \text{ M}\Omega$	I _{SBY}	1	1.4	2	
Latency time for standby-off (delay until there is a valid respose)	V _S > 2.5 V, dark ambient, output is valid	t _{delay}		0.4	0.8	ms
	V _S > 2.5 V, 10 kLux dayligth, output is valid	t _{delay}		1.5	2.5	1115
Duration of standby-off period	V _S > 2.5 V, dark ambient		1			mo
	V _S > 2.5 V, 10 kLux daylight	t _{SBY_OFF}	3			ms

TYPICAL CHARACTERISTICS ($T_{amb} = 25$ °C, unless otherwise specified)





Fig. 18 - Delay Time after Standby-off until the TSOP3... is ready to receive Data

IR Receiver Modules for 3D Synchronization Signals



PACKAGE DIMENSIONS in millimeters

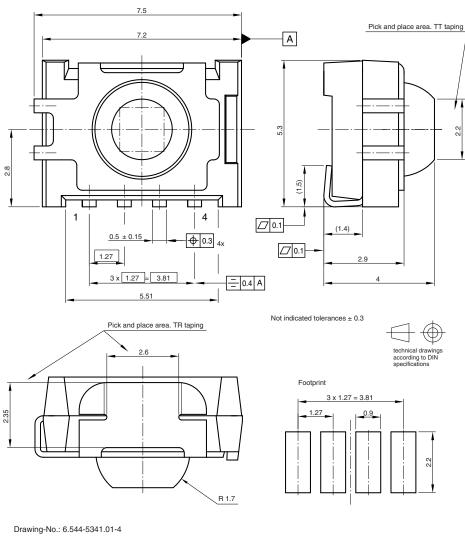

Drawing-No.: 6.544-5341.01-4 Issue: 8; 02.09.09

ASSEMBLY INSTRUCTIONS

Reflow Soldering

- Reflow soldering must be done within 72 h while stored under a max. temperature of 30 °C, 60 % RH after opening the dry pack envelope
- Set the furnace temperatures for pre-heating and heating in accordance with the reflow temperature profile as shown in the diagram. Excercise extreme care to keep the maximum temperature below 260 °C. The temperature shown in the profile means the temperature at the device surface. Since there is a temperature difference between the component and the circuit board, it should be verified that the temperature of the device is accurately being measured
- Handling after reflow should be done only after the work surface has been cooled off


Manual Soldering

- Use a soldering iron of 25 W or less. Adjust the temperature of the soldering iron below 300 °C
- Finish soldering within 3 s
- Handle products only after the temperature has cooled off





Vishay Semiconductors


VISHAY LEAD (Pb)-FREE REFLOW SOLDER PROFILE




TAPING VERSION TSOP..TT DIMENSIONS in millimeters








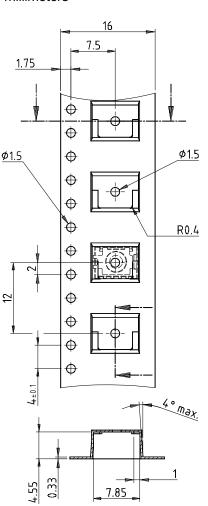

IR Receiver Modules for 3D Synchronization Signals




TAPING VERSION TSOP..TR DIMENSIONS in millimeters

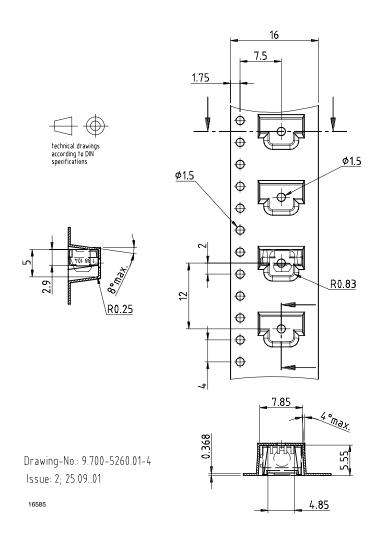



Vishay Semiconductors


REEL DIMENSIONS in millimeters

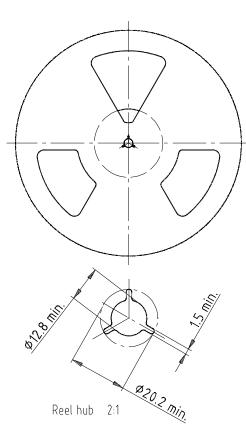

Drawing-No.: 9.800-5052.V2-4

Issue: 1; 07.05.02

16734



Form of the leave open of the wheel is supplier specific.


Dimension acc. to IEC EN 60 286-3

Tape width 16



technical drawings according to DIN specifications

LEADER AND TRAILER DIMENSIONS in millimeters

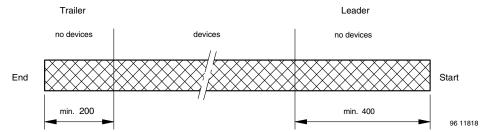

COVER TAPE PEEL STRENGTH

According to DIN EN 60286-3 0.1 N to 1.3 N 300 mm/min. \pm 10 mm/min. 165° to 180° peel angle

LABEL

Standard bar code labels for finished goods

The standard bar code labels are product labels and used for identification of goods. The finished goods are packed in final packing area. The standard packing units are labeled with standard bar code labels before transported as finished goods to warehouses. The labels are on each packing unit and contain Vishay Semiconductor GmbH specific data.


IR Receiver Modules for 3D Synchronization Signals



VISHAY SEMICONDUCTOR GmbH STANDARD BAR CODE PRODUCT LABEL (finished goods)				
PLAIN WRITTING	ABBREVIATION	LENGTH		
Item-description	-	18		
Item-number	INO	8		
Selection-code	SEL	3		
LOT-/serial-number	BATCH	10		
Data-code	COD	3 (YWW)		
Plant-code	PTC	2		
Quantity	QTY	8		
Accepted by	ACC	-		
Packed by	PCK	-		
Mixed code indicator	MIXED CODE	-		
Origin	xxxxxxx+	Company logo		
LONG BAR CODE TOP	TYPE	LENGTH		
Item-number	N	8		
Plant-code	N	2		
Sequence-number	X	3		
Quantity	N	8		
Total length	-	21		
SHORT BAR CODE BOTTOM	TYPE	LENGTH		
Selection-code	X	3		
Data-code	N	3		
Batch-number	X	10		
Filter	-	1		
Total length	-	17		

DRY PACKING

The reel is packed in an anti-humidity bag to protect the devices from absorbing moisture during transportation and storage.



FINAL PACKING

www.vishay.com

The sealed reel is packed into a cardboard box. A secondary cardboard box is used for shipping purposes.

RECOMMENDED METHOD OF STORAGE

Dry box storage is recommended as soon as the aluminum bag has been opened to prevent moisture absorption. The following conditions should be observed, if dry boxes are not available:


- Storage temperature 10 °C to 30 °C
- Storage humidity ≤ 60 % RH max.

After more than 72 h under these conditions moisture content will be too high for reflow soldering.

In case of moisture absorption, the devices will recover to the former condition by drying under the following condition: 192 h at 40 °C + 5 °C/- 0 °C and < 5 % RH (dry air/nitrogen) or

96 h at 60 °C + 5 °C and < 5 % RH for all device containers or

24 h at 125 $^{\circ}$ C + 5 $^{\circ}$ C not suitable for reel or tubes. An EIA JEDEC standard JESD22-A112 level 4 label is included on all dry bags.



Example of JESD22-A112 level 4 label

Rev. 1.1, 14-Dec-10

.com Document Number: 83298





Vishay Semiconductors

ESD PRECAUTION

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the antistatic shielding bag. Electro-static sensitive devices warning labels are on the packaging.

VISHAY SEMICONDUCTORS STANDARD BAR CODE LABELS

The Vishay Semiconductors standard bar code labels are printed at final packing areas. The labels are on each packing unit and contain Vishay Semiconductors specific data.



16962



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.