


### LOW-POWER SINGLE SCHMITT-TRIGGER INVERTER

Check for Samples: SN74AUP1G14

#### **FEATURES**

- Available in the Texas Instruments NanoStar™ Package
- Low Static-Power Consumption (I<sub>CC</sub> = 0.9 μA Max)
- Low Dynamic-Power Consumption (C<sub>pd</sub> = 4.4 pF Typ at 3.3 V)
- Low Input Capacitance (C<sub>I</sub> = 1.5 pF Typ)
- Low Noise Overshoot and Undershoot <10% of V<sub>CC</sub>
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Includes Schmitt-Trigger Inputs

- Wide Operating V<sub>CC</sub> Range of 0.8 V to 3.6 V
- Optimized for 3.3-V Operation
- 3.6-V I/O Tolerant to Support Mixed-Mode Signal Operation
- $t_{nd} = 4.9 \text{ ns Max at } 3.3 \text{ V}$
- Suitable for Point-to-Point Applications
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)

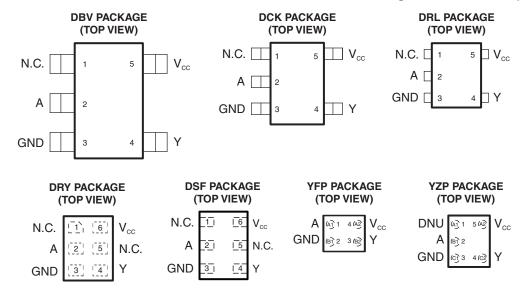

N.C. - No internal connection.

DNU - Do not use

See mechancial drawings for dimensions.

#### **DESCRIPTION/ORDERING INFORMATION**


The AUP family is TI's premier solution to the industry's low power needs in battery-powered portable applications. This family ensures a very low static and dynamic power consumption across the entire  $V_{CC}$  range of 0.8 V to 3.6 V, resulting in an increased battery life. This product also maintains excellent signal integrity (see Figure 1 and Figure 2).

This device functions as an independent gate with Schmitt-trigger inputs, which allows for slow input transition and better switching-noise immunity at the input.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.








Figure 1. AUP - The Lowest-Power Family

Figure 2. Excellent Signal Integrity

NanoStar<sup>™</sup> package technology is a major breakthrough in IC packaging concepts, using the die as the package.

This device is fully specified for partial-power-down applications using I<sub>off</sub>. The I<sub>off</sub> circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

#### ORDERING INFORMATION(1)

T <sub>A</sub>	PACKAGE <sup>(2)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING <sup>(3)</sup>
	NanoStar – WCSP (DSBGA) 0.23-mm large bump – YFP	Reel of 3000	SN74AUP1G14YFPR	HF_
	NanoStar – WCSP (DSBGA) 0.23-mm large bump – YZP (Pb-free)	Reel of 3000	SN74AUP1G14YZPR	HF_
–40°C to 85°C	QFN – DRY	Reel of 5000	SN74AUP1G14DRYR	HF
10 0 10 00 0	uQFN – DSF	Reel of 5000	SN74AUP1G14DSFR	HF
	SOT (SOT-23) – DBV	Reel of 3000	SN74AUP1G14DBVR	H14_
	SOT (SC-70) - DCK	Reel of 3000	SN74AUP1G14DCKR	HF_
	SOT (SOT-553) – DRL	Reel of 4000	SN74AUP1G14DRLR	HF_

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.
- (3) DBV/DCK/DRL: The actual top-side marking has one additional character that designates the wafer fab/assembly site. YFP/YZP: The actual top-side marking has three preceding characters to denote year, month, and sequence code, and one following character to designate the wafer fab/assembly site. Pin 1 identifier indicates solder-bump composition (1 = SnPb, = Pb-free).

#### **FUNCTION TABLE**

INPUT A	OUTPUT Y
Н	L
L	Н

LOGIC DIAGRAM (POSITIVE LOGIC) (DBV, DCK, DRL, DRT, DRY, and YZP PACKAGES)



LOGIC DIAGRAM (POSITIVE LOGIC) (YFP PACKAGE)



Submit Documentation Feedback

Copyright © 2003–2010, Texas Instruments Incorporated



#### ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	4.6	V
$V_{I}$	Input voltage range <sup>(2)</sup>		-0.5	4.6	V
Vo	Voltage range applied to any output in the h	igh-impedance or power-off state <sup>(2)</sup>	-0.5	4.6	V
Vo	Voltage range applied to any output in the h	igh or low state <sup>(2)</sup>	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current		±20	mA	
	Continuous current through V <sub>CC</sub> or GND			±50	mA
		DBV package		206	
		DCK package		252	
0	Dealer at the second income dames (3)	DRL package		142	°C/W
$\theta_{\sf JA}$	Package thermal impedance (3)	DSF package		300	
		DRY package		234	
		YFP/YZP package		132	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

#### RECOMMENDED OPERATING CONDITIONS(1)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		0.8	3.6	V	
VI	Input voltage		0	3.6	V	
Vo	Output voltage		0	V <sub>CC</sub>	V	
		V <sub>CC</sub> = 0.8 V		-20	μΑ	
		V <sub>CC</sub> = 1.1 V		-1.1		
I <sub>OH</sub> High-level output current	V <sub>CC</sub> = 1.4 V		-1.7			
	nigri-level output current	V <sub>CC</sub> = 1.65 V		-1.9	mA	
		V <sub>CC</sub> = 2.3 V		-3.1		
		V <sub>CC</sub> = 3 V		-4		
		V <sub>CC</sub> = 0.8 V		20	μА	
		V <sub>CC</sub> = 1.1 V		1.1		
	Lour lovel output ourrent	V <sub>CC</sub> = 1.4 V		1.7		
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 1.65 V		1.9	mA	
		V <sub>CC</sub> = 2.3 V		3.1		
		V <sub>CC</sub> = 3 V		4		
T <sub>A</sub>	Operating free-air temperature		-40	85	°C	

<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

Product Folder Link(s): SN74AUP1G14

<sup>2)</sup> The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.



#### **ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V	T <sub>A</sub> = 2	5°C	T <sub>A</sub> = -40°C	to 85°C	UNIT	
PARAMETER		V <sub>cc</sub>	MIN	MAX	MIN	MAX	UNII	
		0.8 V	0.3	0.6	0.3	0.6		
V		1.1 V	0.53	0.9	0.53	0.9		
V <sub>T+</sub> Positive-going		1.4 V	0.74	1.11	0.74	1.11	V	
input threshold		1.65 V	0.91	1.29	0.91	1.29	V	
voltage		2.3 V	1.37	1.77	1.37	1.77		
		3 V	1.88	2.29	1.88	2.29		
		0.8 V	0.1	0.6	0.1	0.6		
V		1.1 V	0.26	0.65	0.26	0.65		
V <sub>T</sub> _ Negative-going		1.4 V	0.39	0.75	0.39	0.75	V	
input threshold		1.65 V	0.47	0.84	0.47	0.84	V	
voltage		2.3 V	0.69	1.04	0.69	1.04		
		3 V	0.88	1.24	0.88	1.24		
		0.8 V	0.07	0.5	0.07	0.5		
		1.1 V	0.08	0.46	0.08	0.46		
$\Delta V_T$		1.4 V	0.18	0.56	0.18	0.56	.,	
Hysteresis (V <sub>T+</sub> – V <sub>T-</sub> )		1.65 V	0.27	0.66	0.27	0.66	V	
(   +     -/		2.3 V	0.53	0.92	0.53	0.92		
		3 V	0.79	1.31	0.79	1.31		
	I <sub>OH</sub> = -20 μA	0.8 V to 3.6 V	V <sub>CC</sub> - 0.1		V <sub>CC</sub> - 0.1			
	I <sub>OH</sub> = -1.1 mA	1.1 V	0.75 × V <sub>CC</sub>		0.7 × V <sub>CC</sub>			
	$I_{OH} = -1.7 \text{ mA}$	1.4 V	1.11		1.03			
	$I_{OH} = -1.9 \text{ mA}$	1.65 V	1.32		1.3		V	
V <sub>OH</sub>	$I_{OH} = -2.3 \text{ mA}$	227	2.05		1.97		v	
	I <sub>OH</sub> = -3.1 mA	2.3 V	1.9		1.85			
	I <sub>OH</sub> = -2.7 mA	2.1/	2.72		2.67			
	$I_{OH} = -4 \text{ mA}$	3 V	2.6		2.55			
	I <sub>OL</sub> = 20 μA	0.8 V to 3.6 V		0.1		0.1		
	I <sub>OL</sub> = 1.1 mA	1.1 V		$0.3 \times V_{CC}$		$0.3 \times V_{CC}$		
	$I_{OL} = 1.7 \text{ mA}$	1.4 V		0.31		0.37		
V	$I_{OL} = 1.9 \text{ mA}$	1.65 V		0.31		0.35	V	
$V_{OL}$	$I_{OL} = 2.3 \text{ mA}$	2.3 V		0.31		0.33	V	
	$I_{OL} = 3.1 \text{ mA}$	2.5 V		0.44		0.45		
	$I_{OL} = 2.7 \text{ mA}$	3 V		0.31		0.33		
	$I_{OL} = 4 \text{ mA}$	3 V		0.44		0.45		
I <sub>I</sub> A input	$V_I = GND$ to 3.6 V	0 V to 3.6 V		0.1		0.5	μΑ	
l <sub>off</sub>	$V_I$ or $V_O = 0 V$ to 3.6 V	0 V		0.2		0.6	μΑ	
$\Delta I_{\text{off}}$	$V_I$ or $V_O = 0 V$ to 3.6 V	0 V to 0.2 V		0.2		0.6		
I <sub>CC</sub>	$V_I = GND$ or $(V_{CC}$ to 3.6 V), $I_O = 0$	0.8 V to 3.6 V		0.5		0.9	μΑ	
$\Delta I_{CC}$	$V_I = V_{CC} - 0.6 \text{ V}, I_O = 0$	3.3 V		40		50	μΑ	
		0 V			1.5			
C <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	3.6 V			1.5		pF	
C <sub>o</sub>	V <sub>O</sub> = GND	0 V			2.5		pF	

Submit Documentation Feedback

Copyright © 2003–2010, Texas Instruments Incorporated



#### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range,  $C_L = 5 pF$  (unless otherwise noted) (see Figure 3 and Figure 4)

PARAMETER	FROM	TO (OUTPUT)	V <sub>cc</sub>	T,	λ = 25°C		T <sub>A</sub> = -		UNIT							
	(INPUT)	(OUTPUT)		MIN	TYP	MAX	MIN	MAX								
			V 8.0		16.3											
			1.2 V ± 0.1 V	4.2	6.9	11.7	0.9	15	;							
	۸		V	V	V	V	V	V	V	Y	1.5 V ± 0.1 V	3.7	5.2	8.4	1.7	10.7
t <sub>pd</sub>	Α	ř	1.8 V ± 0.15 V	3.3	4.4	6.9	1.9	8.5	ns							
			2.5 V ± 0.2 V	2.8	3.5	4.8	1.8	6.1								
			3.3 V ± 0.3 V	2.5	3	4	1.7	4.9								

#### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range,  $C_L = 10 \text{ pF}$  (unless otherwise noted) (see Figure 3 and Figure 4)

PARAMETER	FROM	TO (OUTPUT)	V <sub>CC</sub>	T,	λ = 25°C		T <sub>A</sub> = -		UNIT					
	(INPUT)	(OUTPUT)	(OUTPOT)	MIN	TYP	MAX	MIN	MAX						
			V 8.0		18.4									
			1.2 V ± 0.1 V	4.6	7.9	13.4	1.3	16.7						
	^	Y		V	V		V	1.5 V ± 0.1 V	4	6	9.6	2.2	11.8	
t <sub>pd</sub>	A		1.8 V ± 0.15 V	3.6	5	7.9	2.4	9.5	9.5 ns					
			2.5 V ± 0.2 V	3.2	4	5.5	2.3	6.8						
		$3.3 \text{ V} \pm 0.3 \text{ V}$	2.9	3.5	4.6	2.1	5.6							

#### **SWITCHING CHARACTERISTICS**

Copyright © 2003-2010, Texas Instruments Incorporated

over recommended operating free-air temperature range,  $C_L = 15 \text{ pF}$  (unless otherwise noted) (see Figure 3 and Figure 4)

PARAMETER	FROM	= = = = = = = = = = = = = = = = = = = =		T,	<sub>\(\)</sub> = 25°C		T <sub>A</sub> = -		UNIT
	(INPUT)	(OUTPUT)	V <sub>CC</sub>	MIN	TYP	MAX	MIN	MAX	
			V 8.0		20.1				17.3
			1.2 V ± 0.1 V	5.5	8.7	14	2.5	17.3	
4	٨	V	1.5 V ± 0.1 V	4.7	6.7	10	3	12.5	
t <sub>pd</sub>	Α	Y	1.8 V ± 0.15 V	4.2	5.6	8.3	3	10.1	ns
			2.5 V ± 0.2 V	3.6	4.5	5.9	2.7	7.4	
			3.3 V ± 0.3 V	3.3	3.9	5	2.5	6.1	

Product Folder Link(s): SN74AUP1G14



#### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range,  $C_L = 30 \text{ pF}$  (unless otherwise noted) (see Figure 3 and Figure 4)

PARAMETER	FROM	TO (OUTPUT)	V <sub>cc</sub>	T,	<sub>\(\)</sub> = 25°C		T <sub>A</sub> = -	40°C 5°C	UNIT	
	(INPUT)	(OUTPUT)		MIN	TYP	MAX	MIN	MAX		
		Y -	V 8.0		25.7					
			V	1.2 V ± 0.1 V	7.4	11.2	17.1	4.5	20.5	
	Δ.			V	1.5 V ± 0.1 V	6.1	8.5	12.3	4.6	14.7
t <sub>pd</sub>	A		1.8 V ± 0.15 V	5.4	7.2	10.3	4.1	12	ns	
			2.5 V ± 0.2 V	4.7	5.7	7.4	3.7	8.8	3	
			3.3 V ± 0.3 V	4.2	5	6.2	3.5	7.3		

#### **OPERATING CHARACTERISTICS**


 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	TYP	UNIT
			0.8 V	4	
		1.2 V ± 0.1 V	4		
	Davis dissination consistence	f = 10 MHz	1.5 V ± 0.1 V	4.1	pF
C <sub>pd</sub>	Power dissipation capacitance	I = IO MHZ	1.8 V ± 0.15 V	4.1	
			2.5 V ± 0.2 V	4.3	
			3.3 V ± 0.3 V	4.4	

Submit Documentation Feedback




# PARAMETER MEASUREMENT INFORMATION (Propagation Delays, Setup and Hold Times, and Pulse Width)



**LOAD CIRCUIT** 

	V <sub>CC</sub> = 0.8 V	V <sub>CC</sub> = 1.2 V ± 0.1 V	V <sub>CC</sub> = 1.5 V ± 0.1 V	V <sub>CC</sub> = 1.8 V ± 0.15 V	$V_{CC}$ = 2.5 V $\pm$ 0.2 V	V <sub>CC</sub> = 3.3 V ± 0.3 V
C <sub>L</sub>	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF
V <sub>M</sub>	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2
V <sub>I</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>

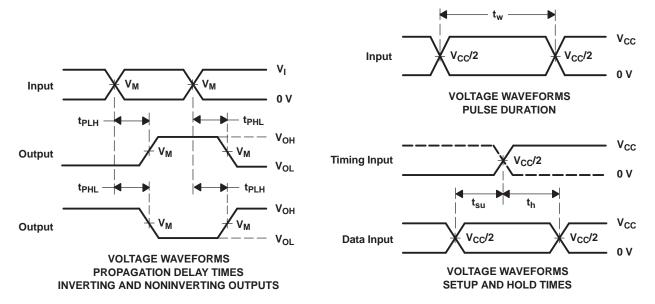


NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_f/t_f = 3$  ns.
- C. The outputs are measured one at a time, with one transition per measurement.
- D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- E. All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuit and Voltage Waveforms




# PARAMETER MEASUREMENT INFORMATION (Enable and Disable Times)



TEST	<b>S</b> 1
t <sub>PLZ</sub> /t <sub>PZL</sub>	2×V <sub>CC</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

LOAD CIRCUIT

	V <sub>CC</sub> = 0.8 V	V <sub>CC</sub> = 1.2 V ± 0.1 V	V <sub>CC</sub> = 1.5 V ± 0.1 V	V <sub>CC</sub> = 1.8 V ± 0.15 V	$V_{CC}$ = 2.5 V $\pm$ 0.2 V	V <sub>CC</sub> = 3.3 V ± 0.3 V
C <sub>L</sub>	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF
V <sub>M</sub>	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2
V <sub>I</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>
V <sub>∆</sub>	0.1 V	0.1 V	0.1 V	0.15 V	0.15 V	0.3 V



NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_r/t_f = 3$  ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G. All parameters and waveforms are not applicable to all devices.

Figure 4. Load Circuit and Voltage Waveforms

Submit Documentation Feedback

21-Oct-2011

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
SN74AUP1G14DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DBVRE4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DBVTE4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKR	ACTIVE	SC70	DCK	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKRE4	ACTIVE	SC70	DCK	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKRG4	ACTIVE	SC70	DCK	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKT	ACTIVE	SC70	DCK	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKTE4	ACTIVE	SC70	DCK	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DCKTG4	ACTIVE	SC70	DCK	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DRLR	ACTIVE	SOT	DRL	5	4000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DRLRG4	ACTIVE	SOT	DRL	5	4000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DRYR	ACTIVE	SON	DRY	6	5000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14DSFR	ACTIVE	SON	DSF	6	5000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74AUP1G14YFPR	ACTIVE	DSBGA	YFP	4	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	



### **PACKAGE OPTION ADDENDUM**

21-Oct-2011

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
SN74AUP1G14YZPR	PREVIEW	DSBGA	YZP	5	3000	TBD	Call TI	Call TI	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## PACKAGE MATERIALS INFORMATION

www.ti.com 2-Mar-2012

#### TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**



#### **TAPE DIMENSIONS**



A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### TAPE AND REEL INFORMATION

#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AUP1G14DBVR	SOT-23	DBV	5	3000	180.0	8.4	3.23	3.17	1.37	4.0	8.0	Q3
SN74AUP1G14DBVT	SOT-23	DBV	5	250	180.0	8.4	3.23	3.17	1.37	4.0	8.0	Q3
SN74AUP1G14DCKR	SC70	DCK	5	3000	180.0	9.2	2.3	2.55	1.2	4.0	8.0	Q3
SN74AUP1G14DCKT	SC70	DCK	5	250	180.0	9.2	2.3	2.55	1.2	4.0	8.0	Q3
SN74AUP1G14DCKT	SC70	DCK	5	250	178.0	9.2	2.4	2.4	1.22	4.0	8.0	Q3
SN74AUP1G14DRLR	SOT	DRL	5	4000	180.0	8.4	1.98	1.78	0.69	4.0	8.0	Q3
SN74AUP1G14DRYR	SON	DRY	6	5000	180.0	9.5	1.15	1.6	0.75	4.0	8.0	Q1
SN74AUP1G14DSFR	SON	DSF	6	5000	180.0	9.5	1.16	1.16	0.5	4.0	8.0	Q2
SN74AUP1G14YFPR	DSBGA	YFP	4	3000	178.0	9.2	0.89	0.89	0.58	4.0	8.0	Q1

www.ti.com 2-Mar-2012



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AUP1G14DBVR	SOT-23	DBV	5	3000	202.0	201.0	28.0
SN74AUP1G14DBVT	SOT-23	DBV	5	250	202.0	201.0	28.0
SN74AUP1G14DCKR	SC70	DCK	5	3000	205.0	200.0	33.0
SN74AUP1G14DCKT	SC70	DCK	5	250	205.0	200.0	33.0
SN74AUP1G14DCKT	SC70	DCK	5	250	180.0	180.0	18.0
SN74AUP1G14DRLR	SOT	DRL	5	4000	202.0	201.0	28.0
SN74AUP1G14DRYR	SON	DRY	6	5000	180.0	180.0	30.0
SN74AUP1G14DSFR	SON	DSF	6	5000	180.0	180.0	30.0
SN74AUP1G14YFPR	DSBGA	YFP	4	3000	220.0	220.0	35.0

## DBV (R-PDSO-G5)

## PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Falls within JEDEC MO-178 Variation AA.



## DBV (R-PDSO-G5)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Publication IPC-7351 is recommended for alternate designs.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.



## DCK (R-PDSO-G5)

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
- D. Falls within JEDEC MO-203 variation AA.



## DCK (R-PDSO-G5)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Publication IPC-7351 is recommended for alternate designs.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.



## DRL (R-PDSO-N5)

## PLASTIC SMALL OUTLINE




- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
- Body dimensions do not include mold flash, interlead flash, protrusions, or gate burrs.

  Mold flash, interlead flash, protrusions, or gate burrs shall not exceed 0,15 per end or side.
- D. JEDEC package registration is pending.



## DRL (R-PDSO-N5)

#### PLASTIC SMALL OUTLINE

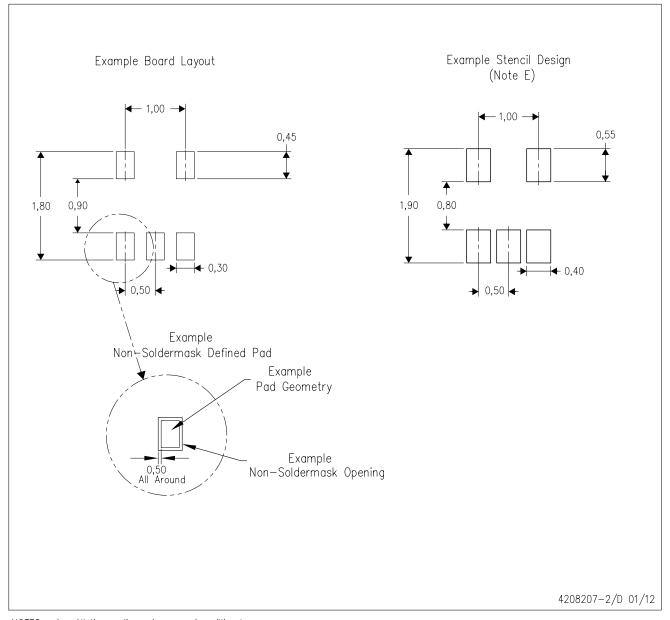

NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
- E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
- F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- G. Side aperture dimensions over—print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.






NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. SON (Small Outline No-Lead) package configuration.
- The exposed lead frame feature on side of package may or may not be present due to alternative lead frame designs.
- E. This package complies to JEDEC MO-287 variation UFAD.
- $frac{f}{K}$  See the additional figure in the Product Data Sheet for details regarding the pin 1 identifier shape.



## DRY (S-PUSON-N6)

#### PLASTIC SMALL OUTLINE NO-LEAD

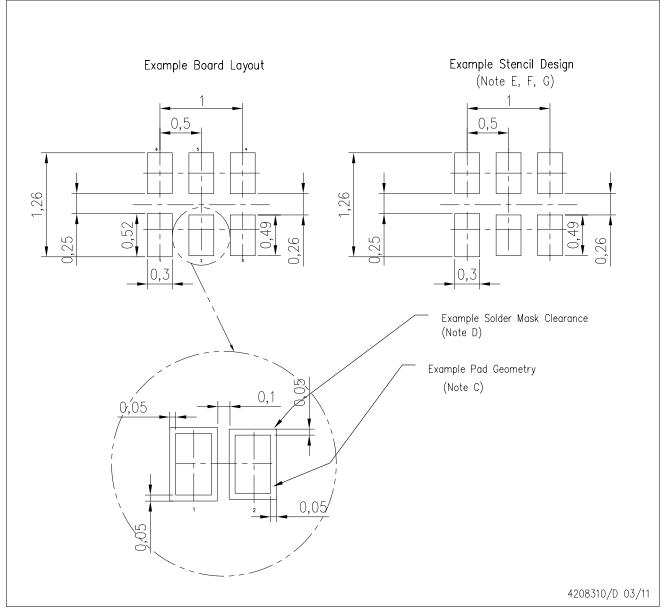

- NOTES: A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
  - E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
  - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.





NOTES: All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.

- B. This drawing is subject to change without notice.
  C. SON (Small Outline No-Lead) package configuration.
  D. This package complies to JEDEC MO-287 variation X2AAF.





## PLASTIC SMALL OUTLINE NO-LEAD



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads. If 2 mil solder mask is outside PCB vendor capability, it is advised to omit solder mask.
- E. Maximum stencil thickness 0,1016 mm (4 mils). All linear dimensions are in millimeters.
- F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- G. Suggest stencils cut with lasers such as Fiber Laser that produce the greatest positional accuracy.
- H. Component placement force should be minimized to prevent excessive paste block deformation.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

Applications

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

ti.com/automotive
ti.com/communications
.ti.com/computers
.ti.com/consumer-apps
.ti.com/energy
.ti.com/industrial
.ti.com/medical
.ti.com/security
ti.com/space-avionics-defense
.ti.com/video
.ti. .ti.

Wireless Connectivity <u>www.ti.com/wirelessconnectivity</u>

OMAP Mobile Processors www.ti.com/omap

**Products** 

TI E2E Community Home Page

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2012, Texas Instruments Incorporated

e2e.ti.com